
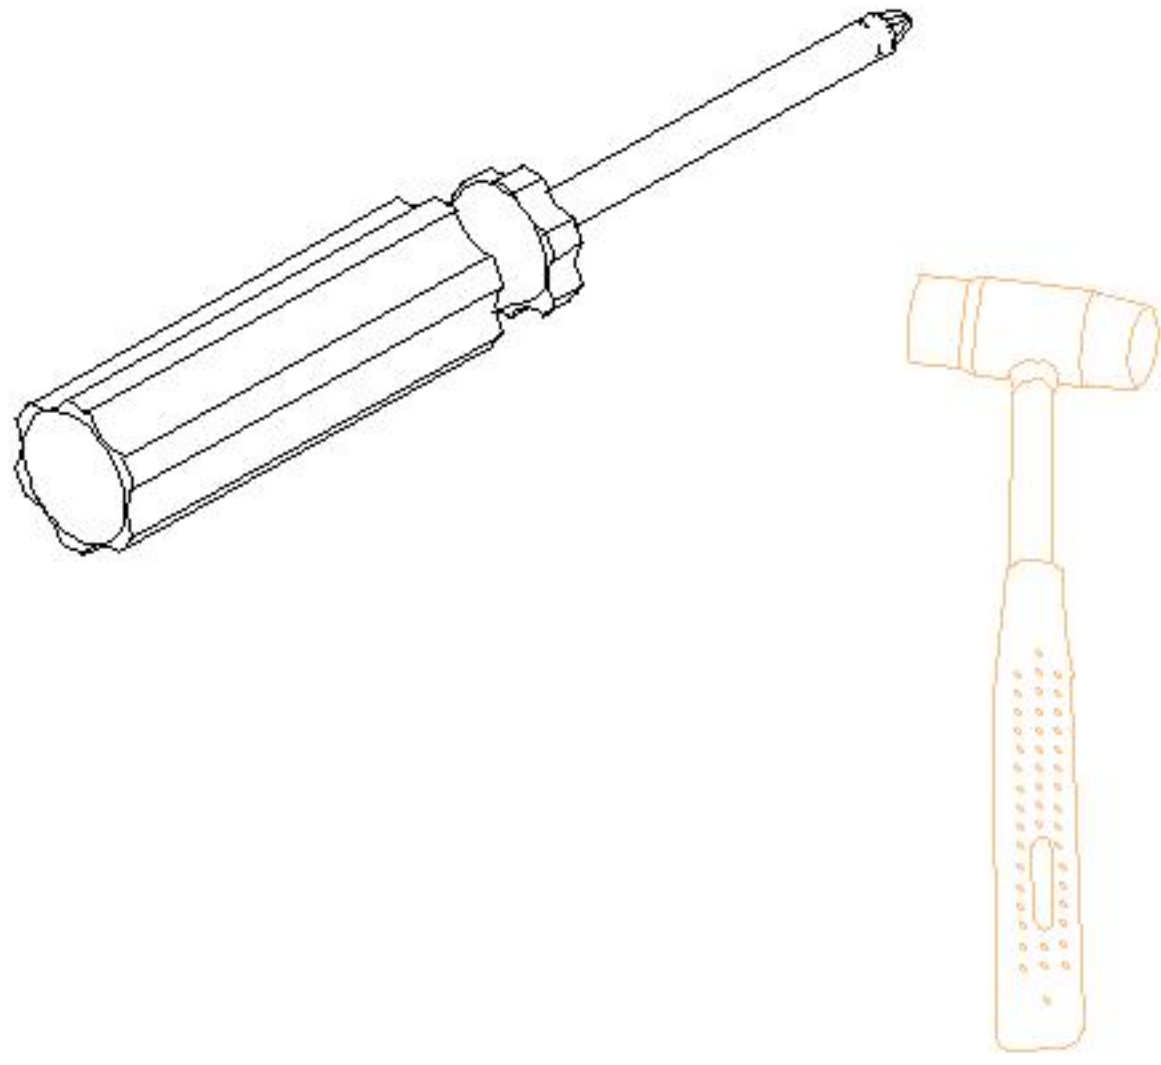
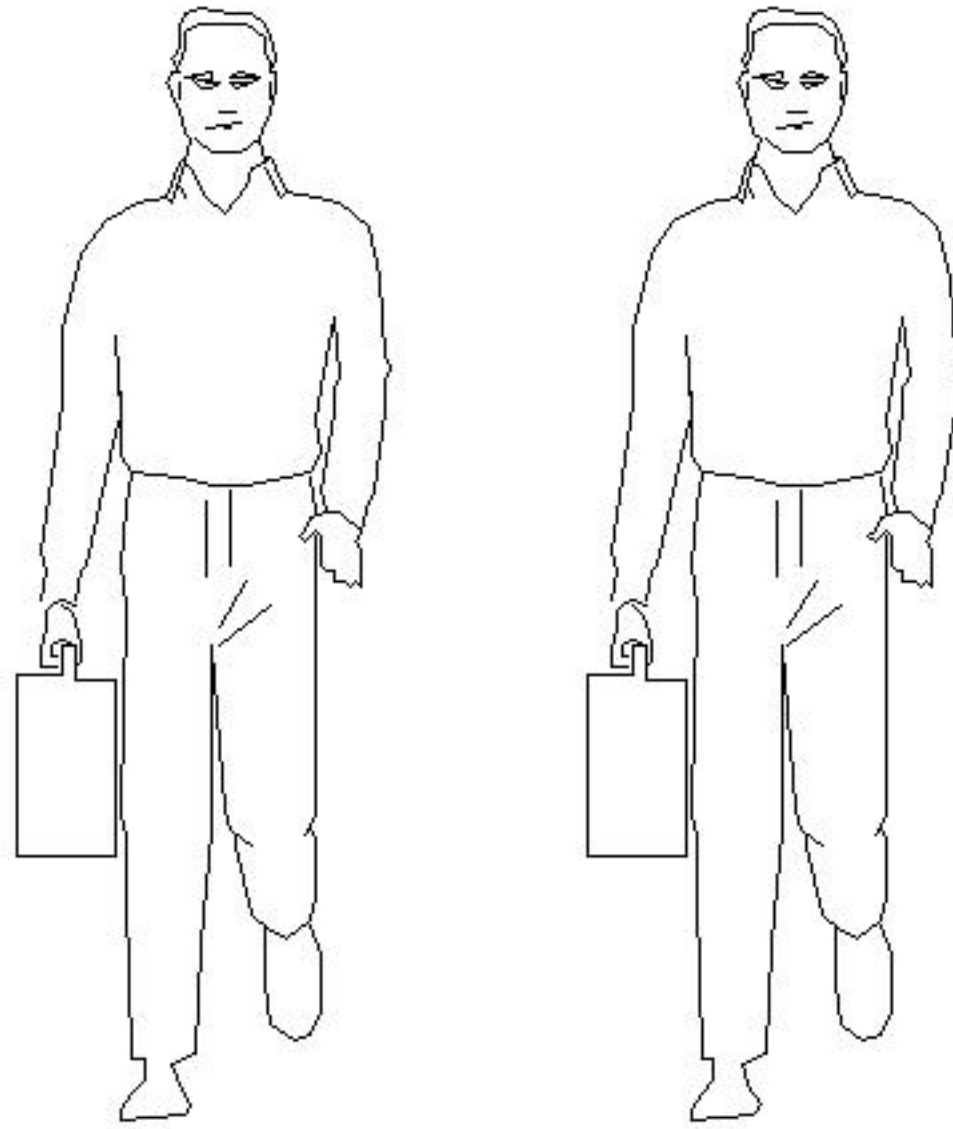
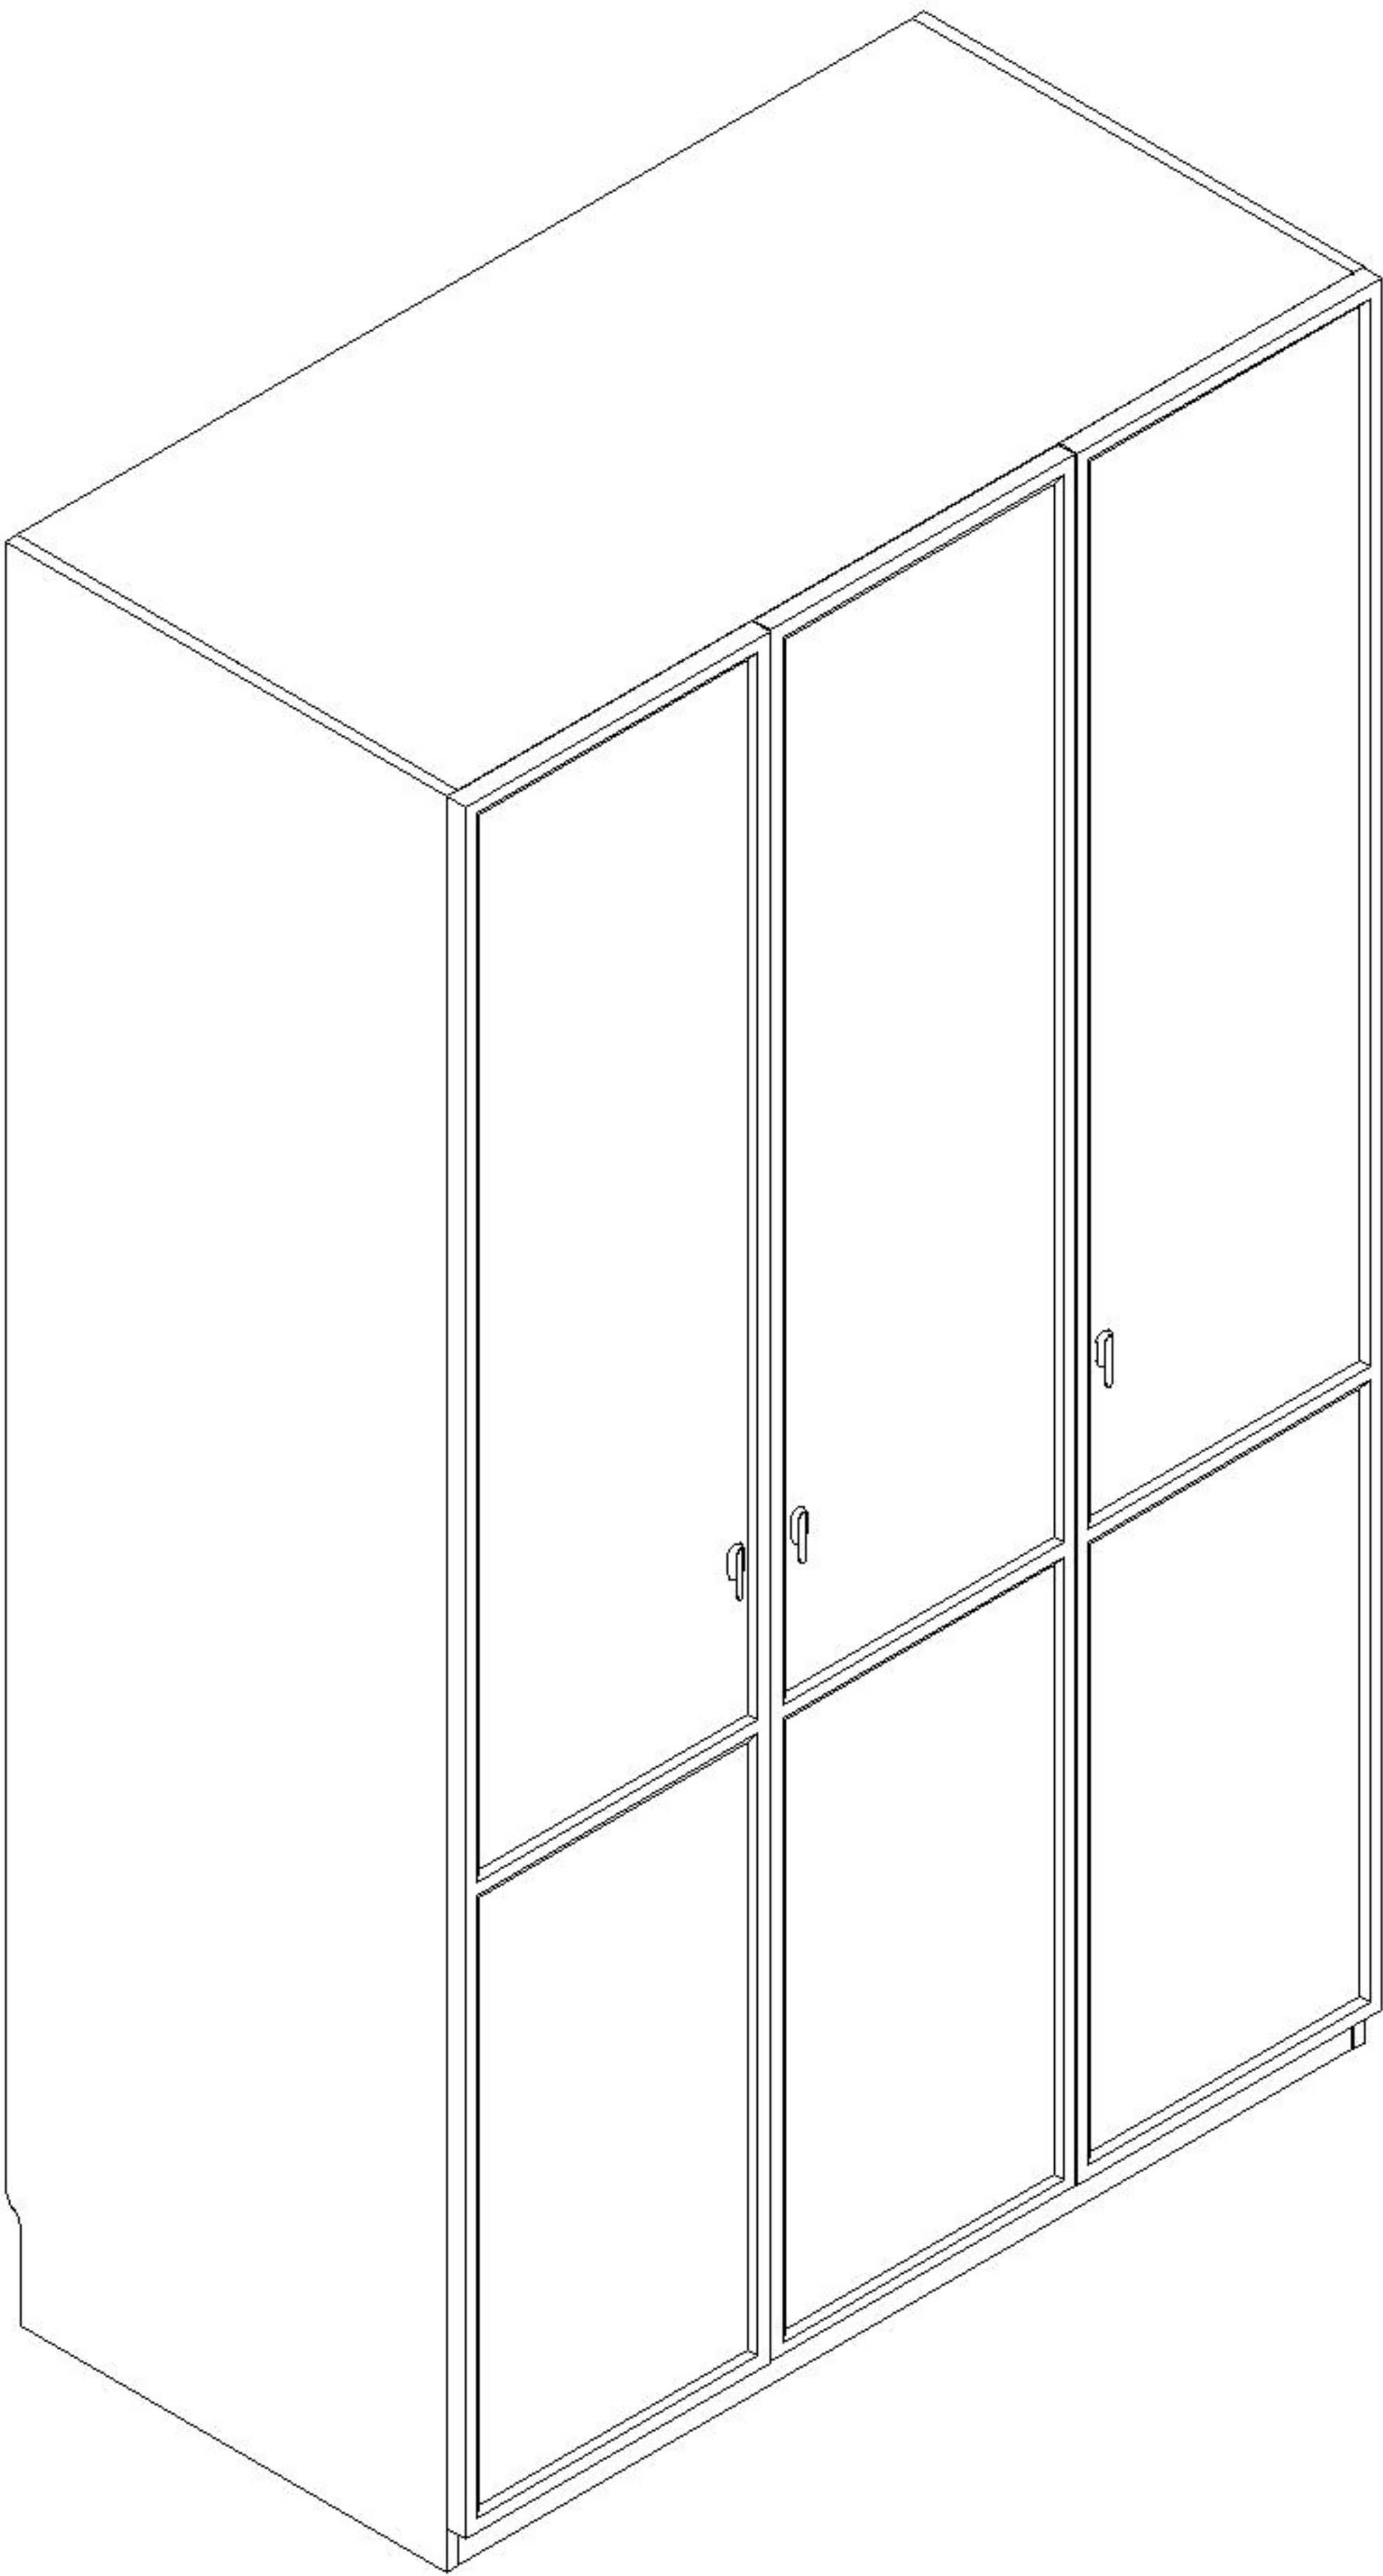
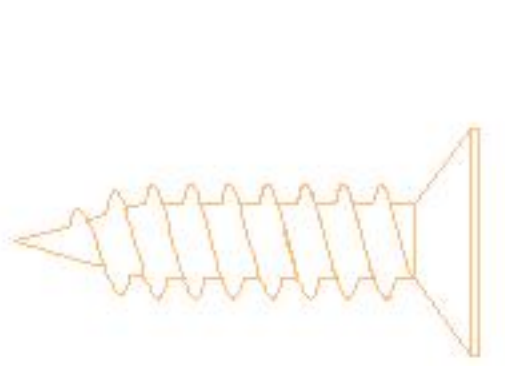
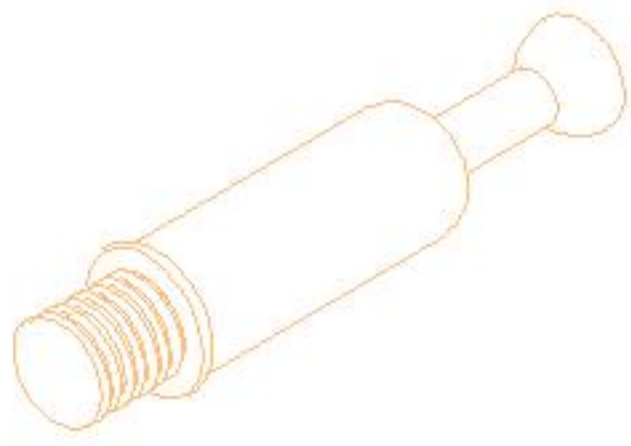
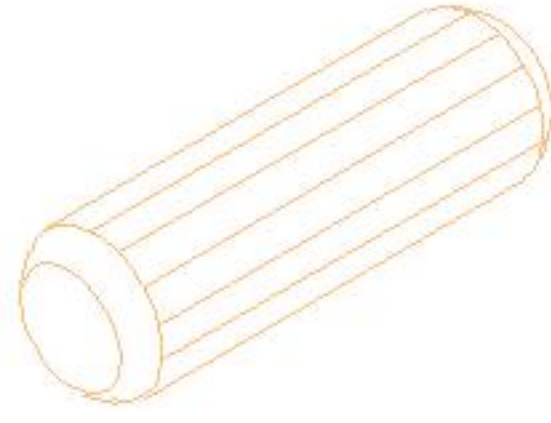
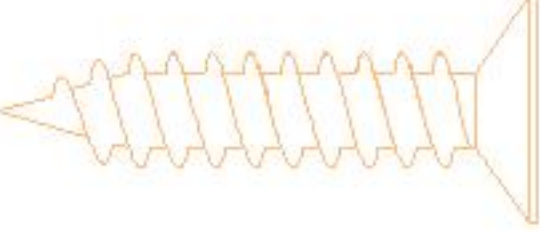
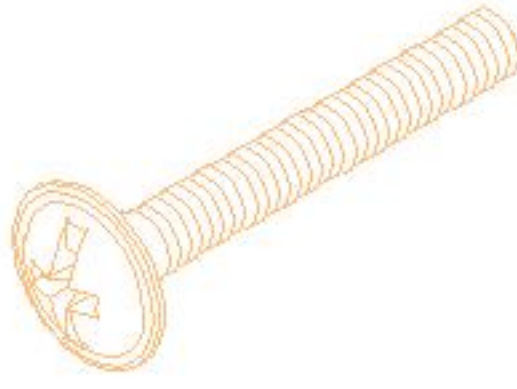
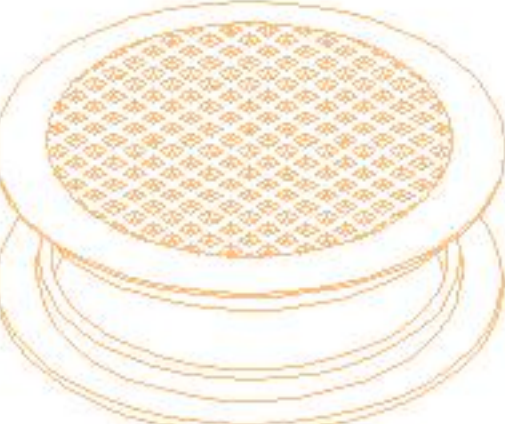
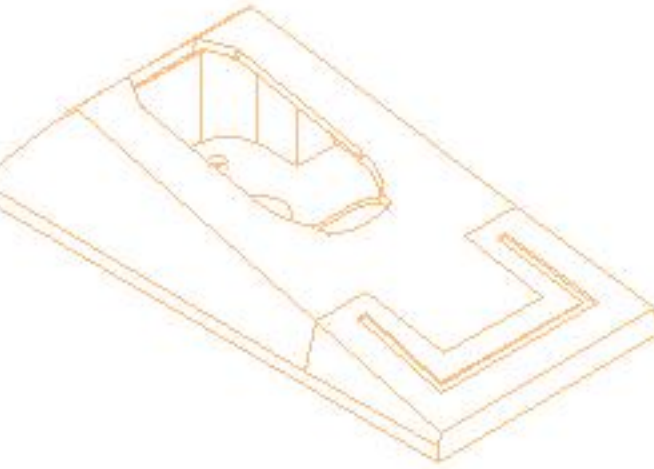
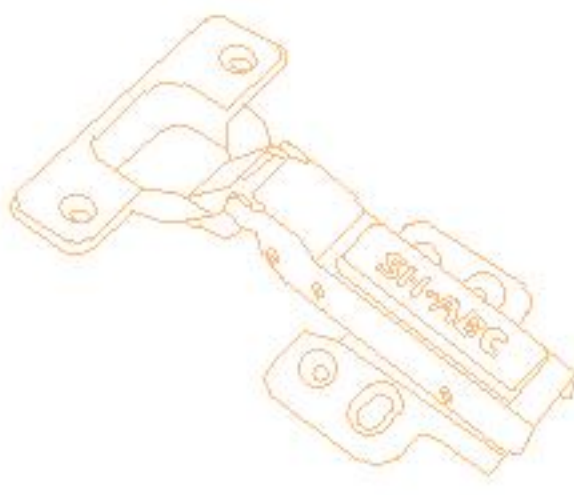
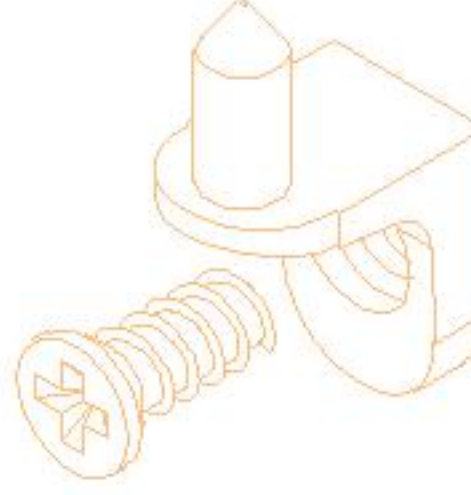
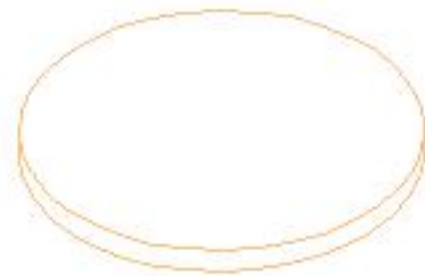
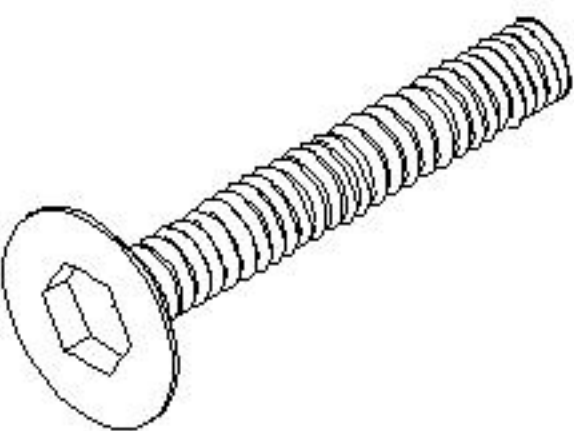
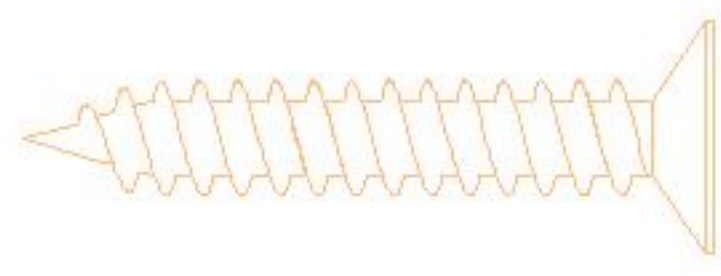
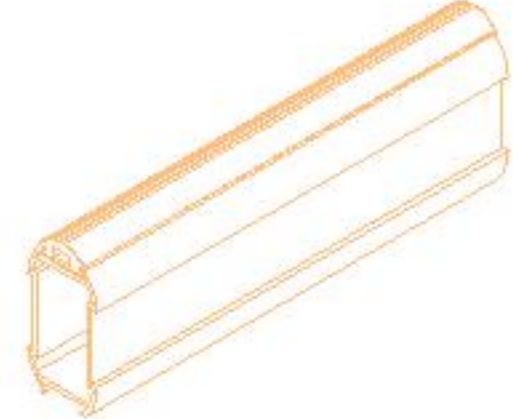
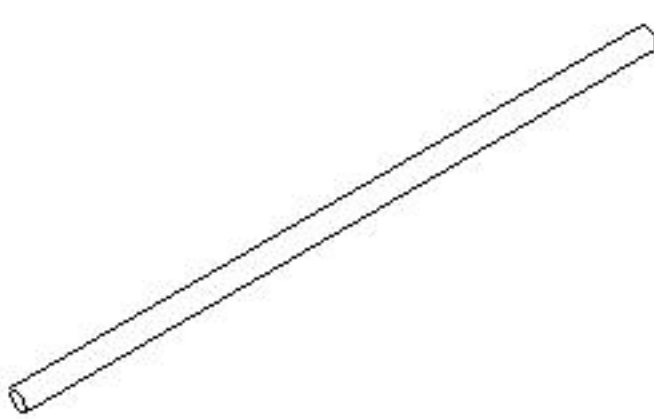
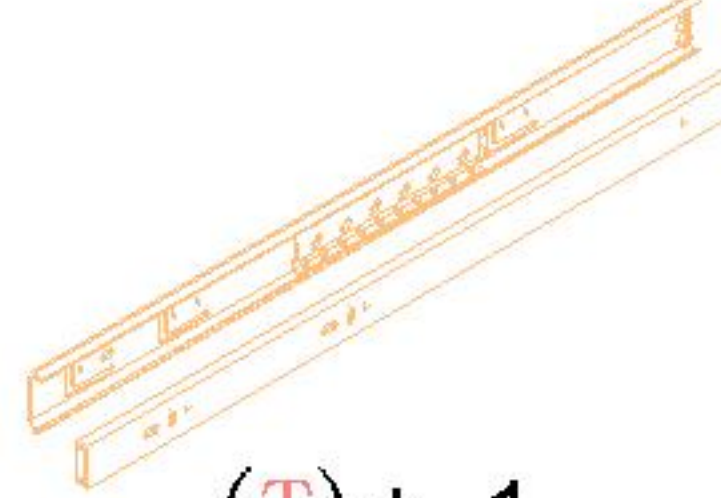


安装示意图/Assembly Instruction

产品名称 Model NO.	T02D-A1
产品规格 Specification	1194*612*2003mm
安装工具 Tool	安装人数 Installer
	

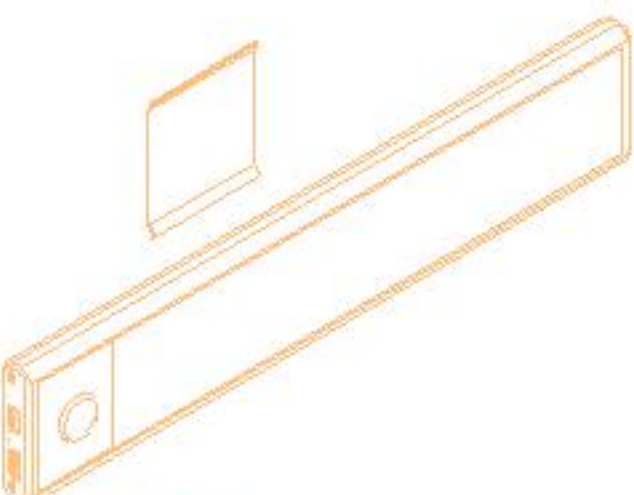

五金表/Hardware list





 (A)* 25 自攻螺丝M3.5x12mm Self-tapping screw	 (B)* 61 二合一螺杆 2-in-1-screw	 (C)* 61 大三合一锁饼 Three-in-one large lock	 (D)* 11 背板扣 Back Plate Buckle-White
 (E)* 13 木榫Ø8x30mm wood tenon	 (F)* 11 自攻螺丝M3.5x16mm Self-tapping screw	 (G)* 3 拉手螺丝-M4x22mm pulling screw	 (H)* 3 拉手 Handle
 (I)* 2 透气孔盖-白色 Vent cover - white	 (J)* 4 挂衣托F874-B Clothes hanger	 (K)* 12 缓冲门铰中弯-Ø40 Hinge-middle bending	 (L)* 12 层板托 shelf support
 (M)* 12 脚垫-灰色 Footrest - Grey	 (N)* 2 过山丝-M7x38mm Self-tapping screw galvanized	 (O)* 1 内六角扳手4mm spanner-(4mm) hex	 (P)* 8 自攻螺丝M4x35mm Self-tapping screw
 (Q)* 1 挂衣杆-L=758mm Clothes hanging rod	 (R)* 1 挂衣杆-L=375mm Clothes hanging rod	 (S)* 8 圆管-Ø14*460 Round tube	 (T)* 1 三节滚珠导轨-18" three-section ball rail
 (U)* 1 感应灯 Induction lamp			

部件表/Parts List



编号NO.	名称Name	规格 (mm) Specification	数量QTY	材质Material
①	右侧板 Side board(R)	2000*574*15	1	三胺板Melamine
②	左侧板 Side board(L)	2000*574*15	1	三胺板Melamine
③	顶板 Top board	1164*574*15	1	三胺板Melamine
④	底板 Bottom board	1164*554*15	1	三胺板Melamine
⑤	长层板 Long laminate	765*532*15	1	三胺板Melamine
⑥	活动层板 Movable shelf	382*532*15	2	三胺板Melamine
⑦	中侧板 Middle side board	1912*534*15	1	三胺板Melamine
⑧	边背拉条 Side back brace	1912*140*15	2	三胺板Melamine
⑨	背拉条 Back brace	1912*140*15	1	三胺板Melamine
⑩	大背板 Big backboard	1922*575*5	1	三胺板Melamine
⑪	小背板 Small sack board	1922*191*5	1	三胺板Melamine
⑫	长脚条 Long foot slat	1164*58*15	2	三胺板Melamine
⑬	中脚条 Middle foot strip	522*58*15	1	三胺板Melamine
⑭	导轨垫条 Rail cushion strip	532*88*25	2	三胺板Melamine
⑮	小抽屉面板 Small drawer's panel	712*82*15	1	三胺板Melamine
⑯	小抽屉侧板 Small Drawer's side board	442*58*15	2	三胺板Melamine
⑰	中拉条 Brace	442*58*15	1	三胺板Melamine
⑱	小抽屉后板 Small drawer's back board	690*58*15	1	三胺板Melamine
⑲	左门板 Door board(L)	1950*396*23	1	吸塑板Blister board
⑳	右门板 Door board(R)	1950*396*23	2	吸塑板Blister board

T02D-A1

安装方法/
Installation method

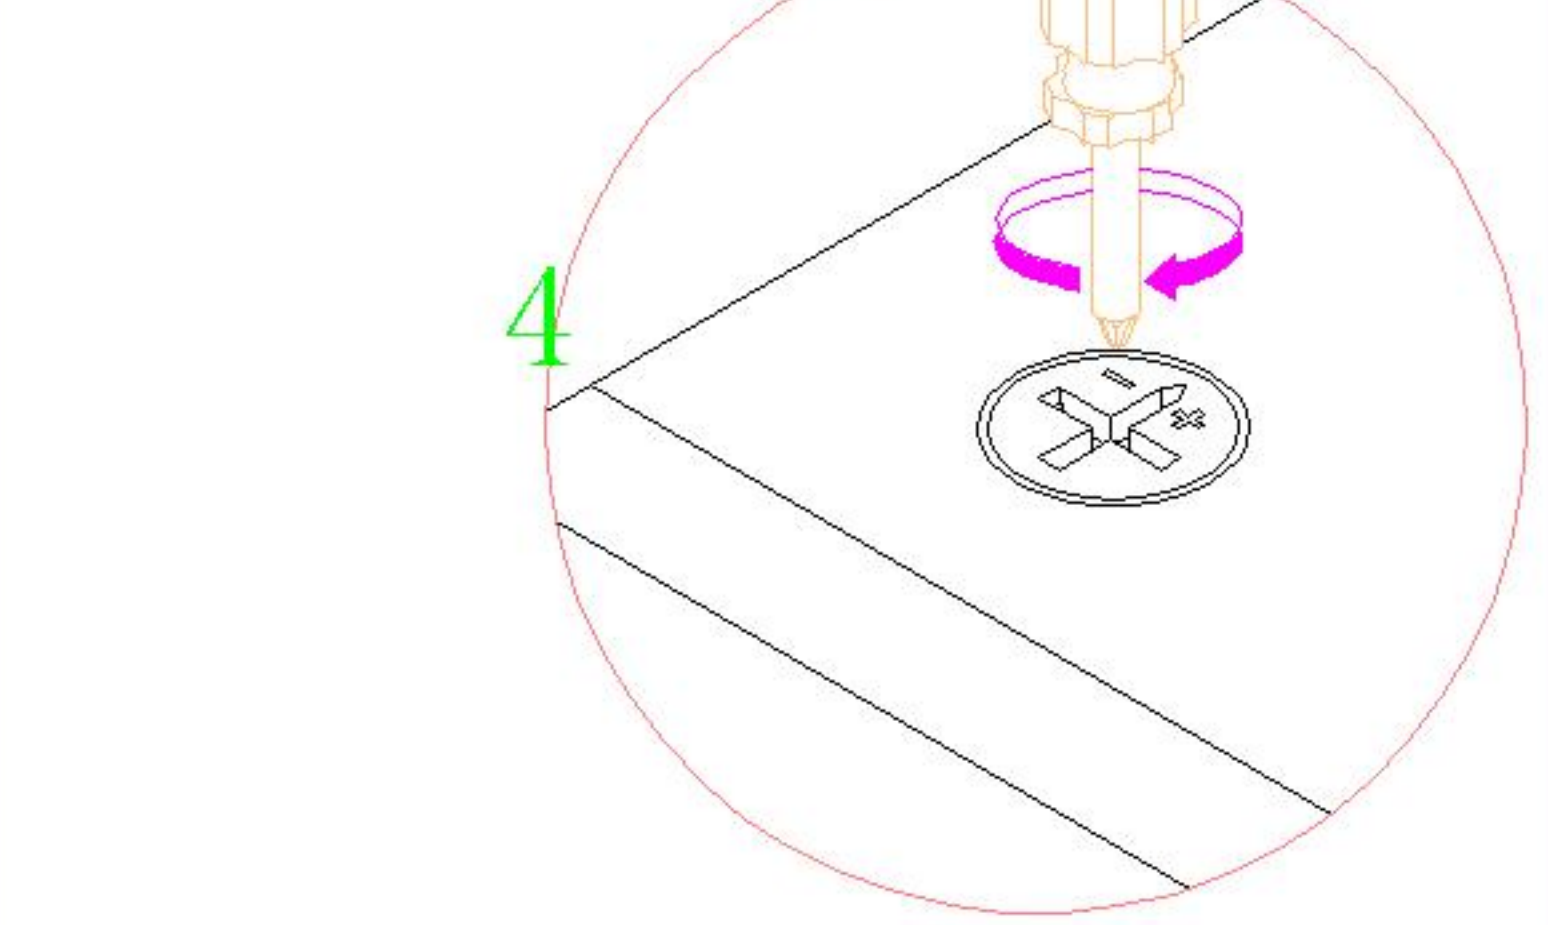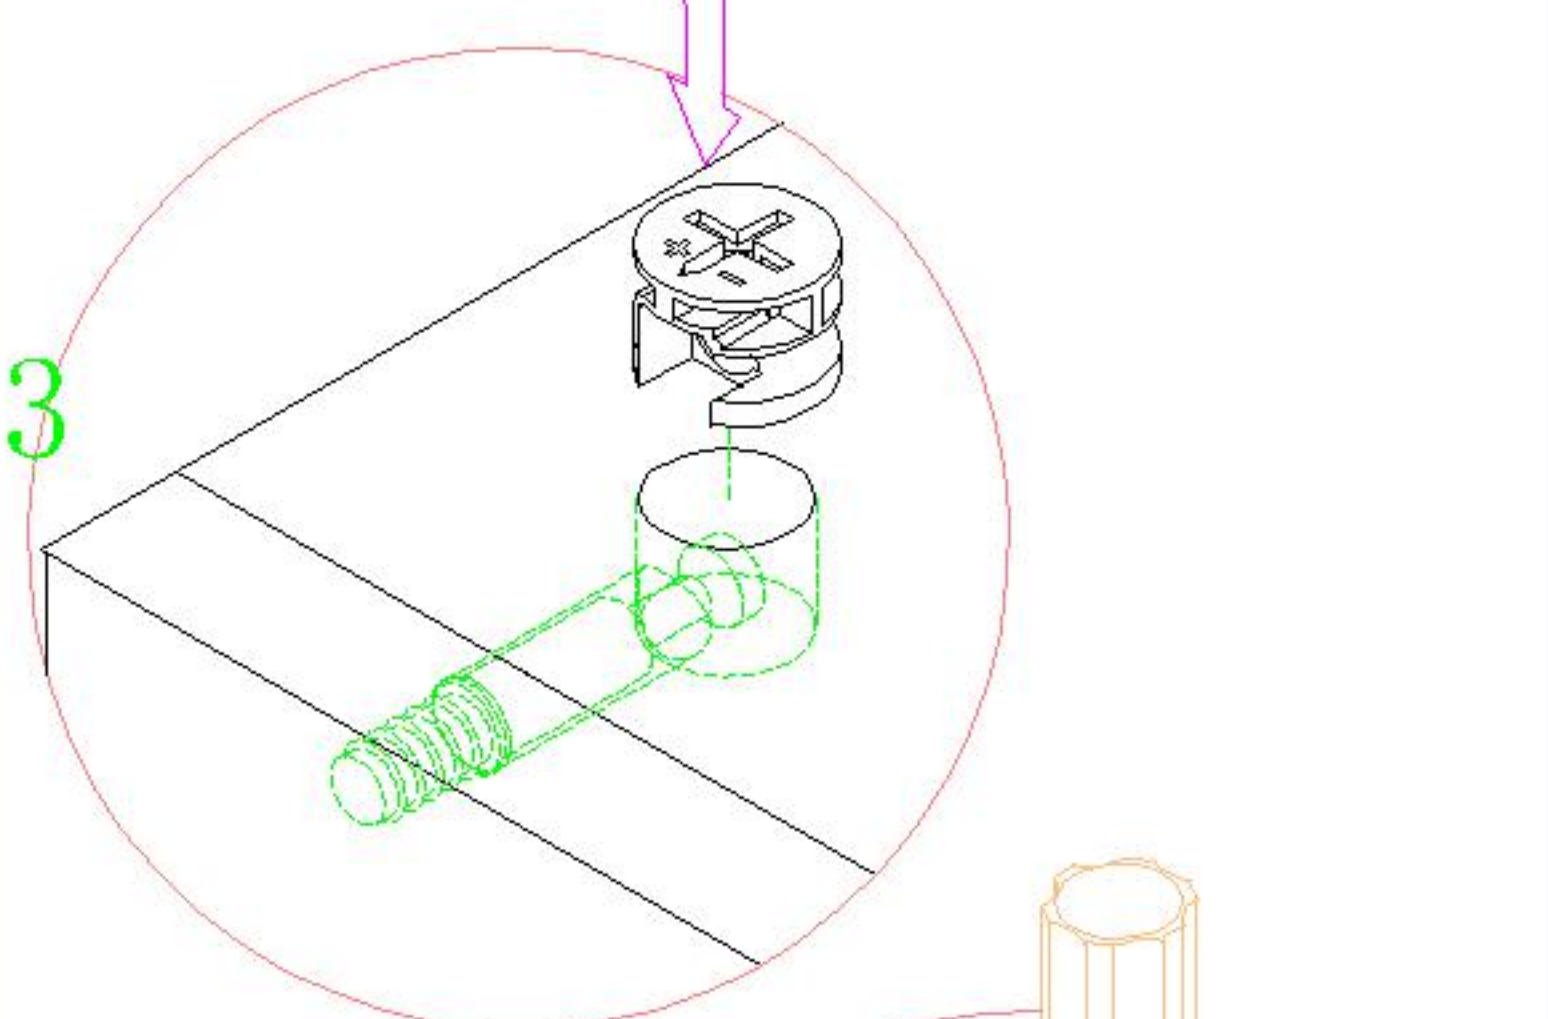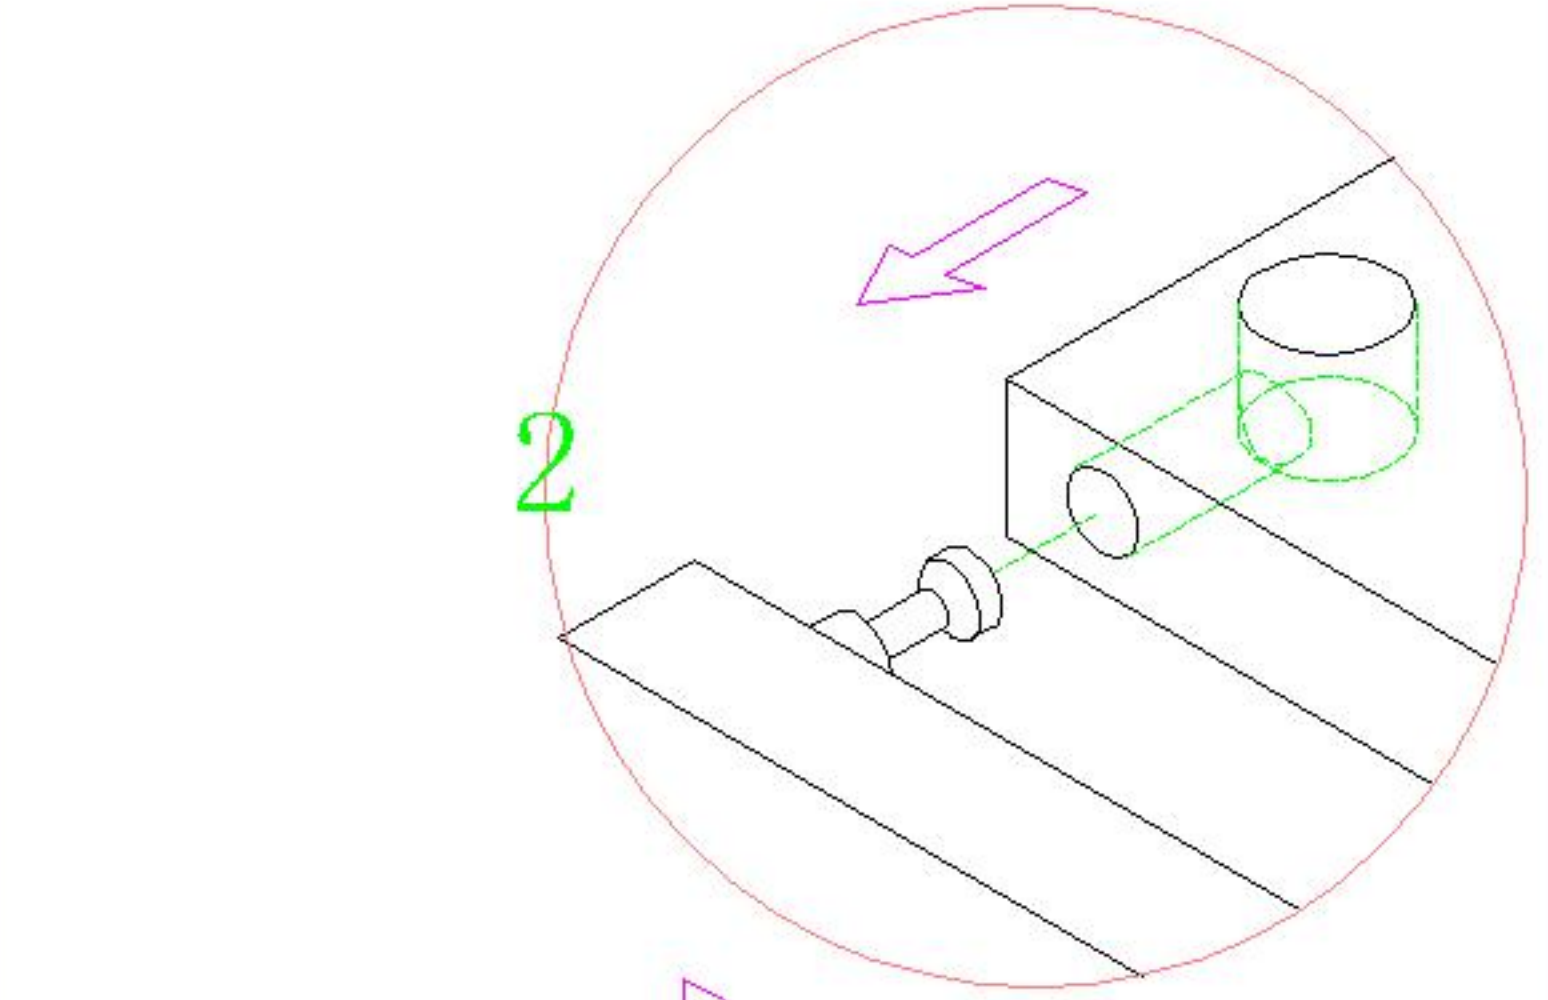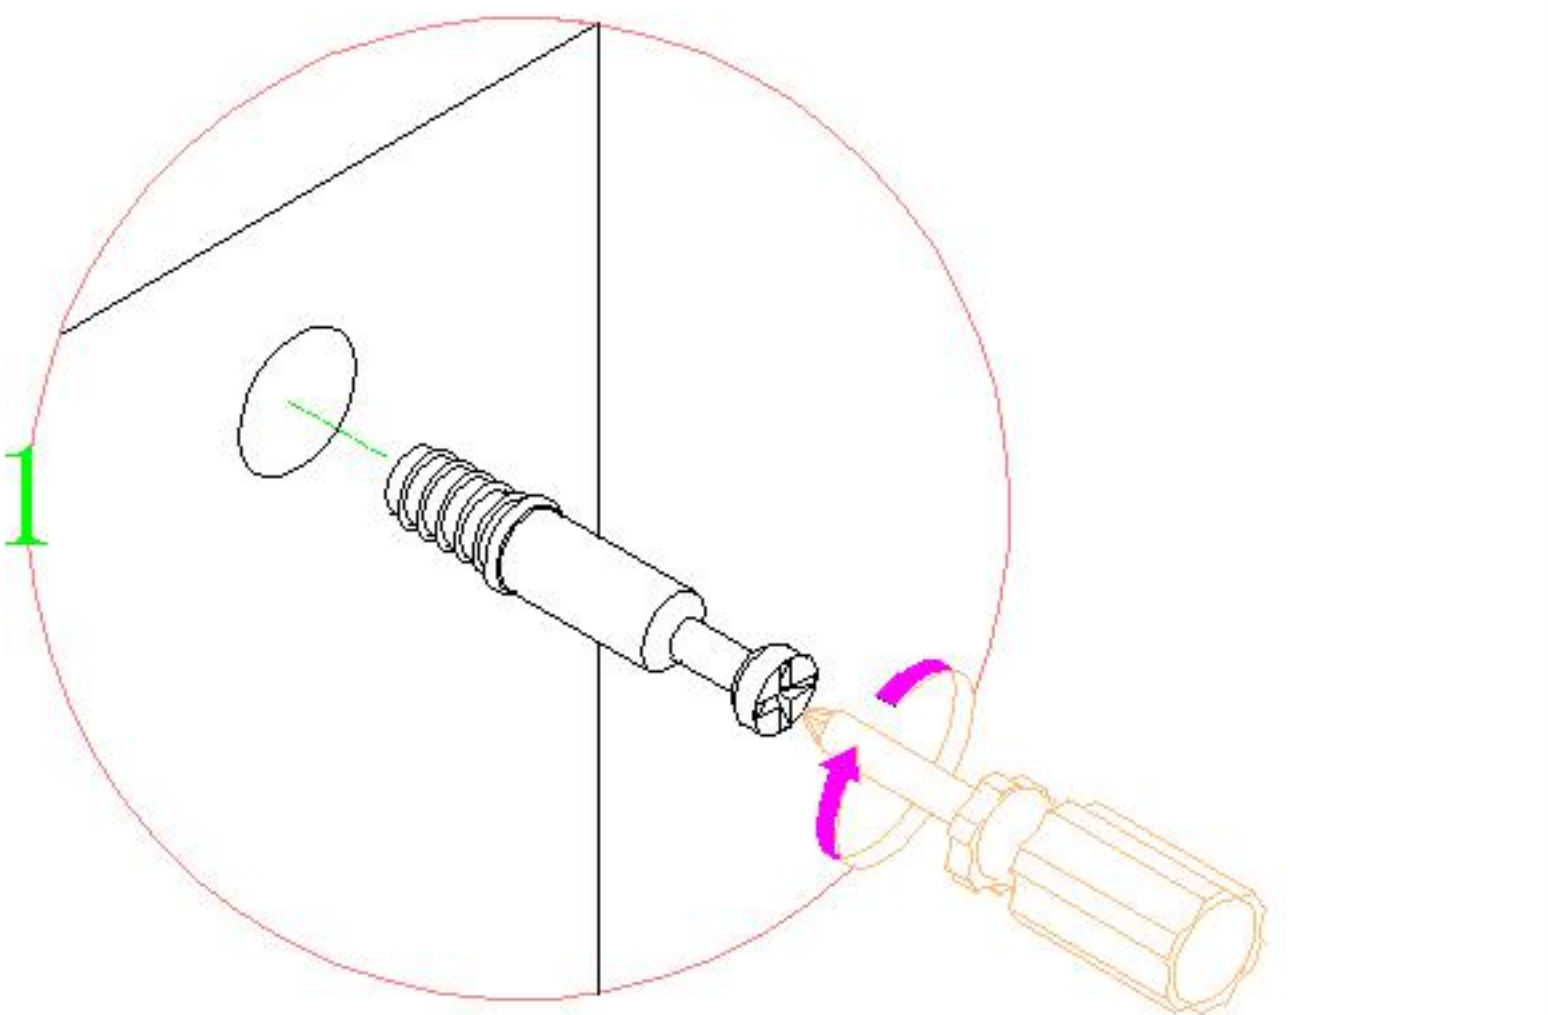

大二合一
two-in-one

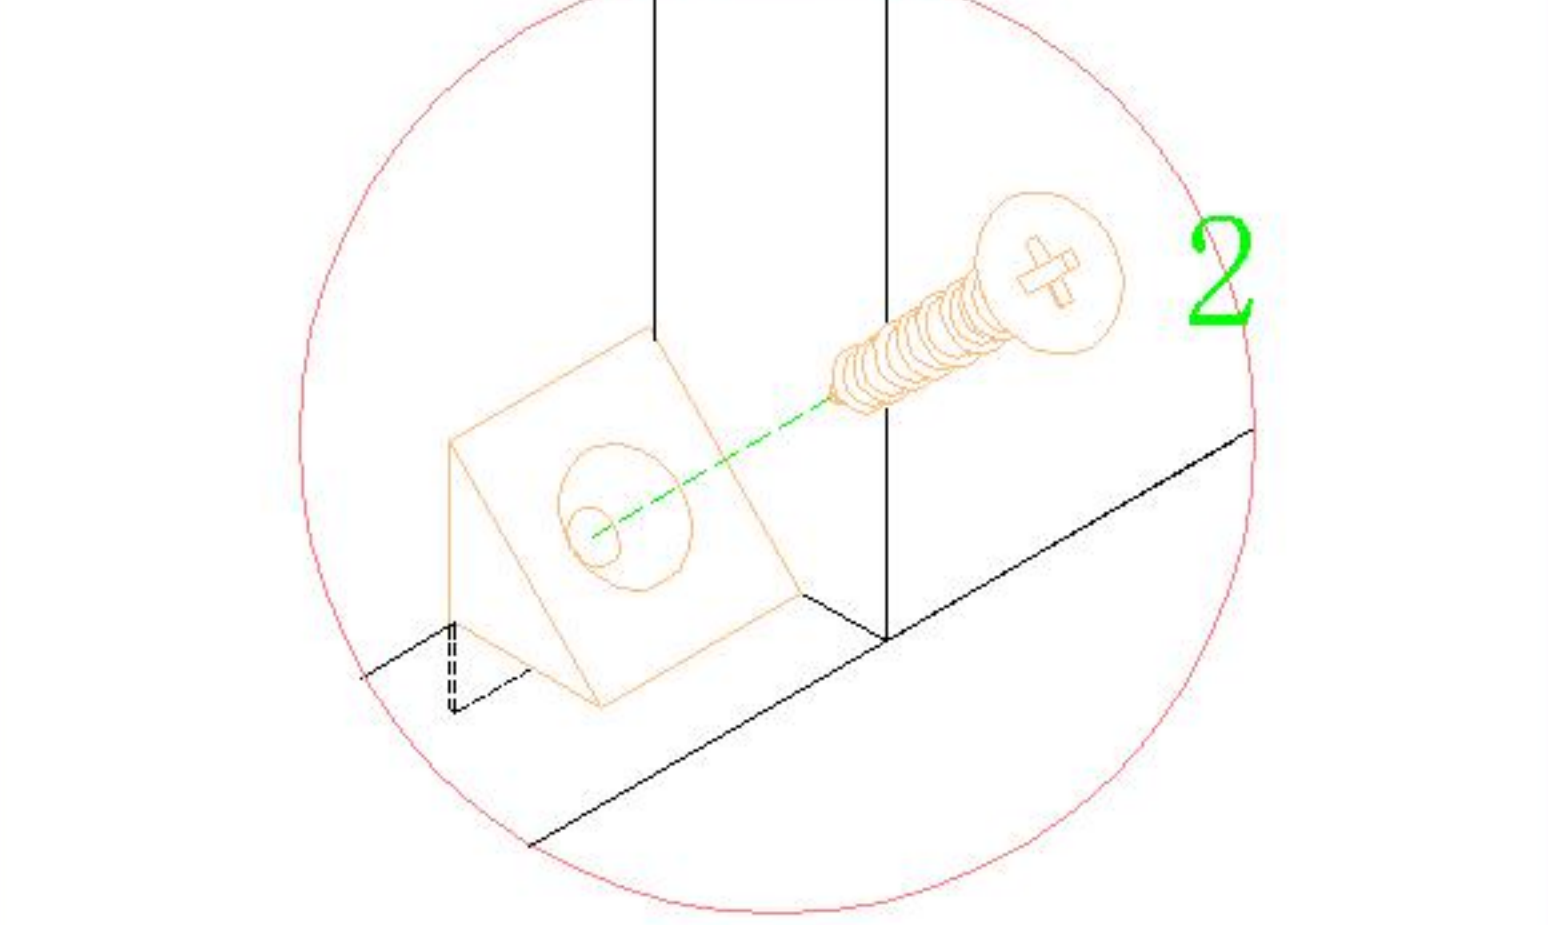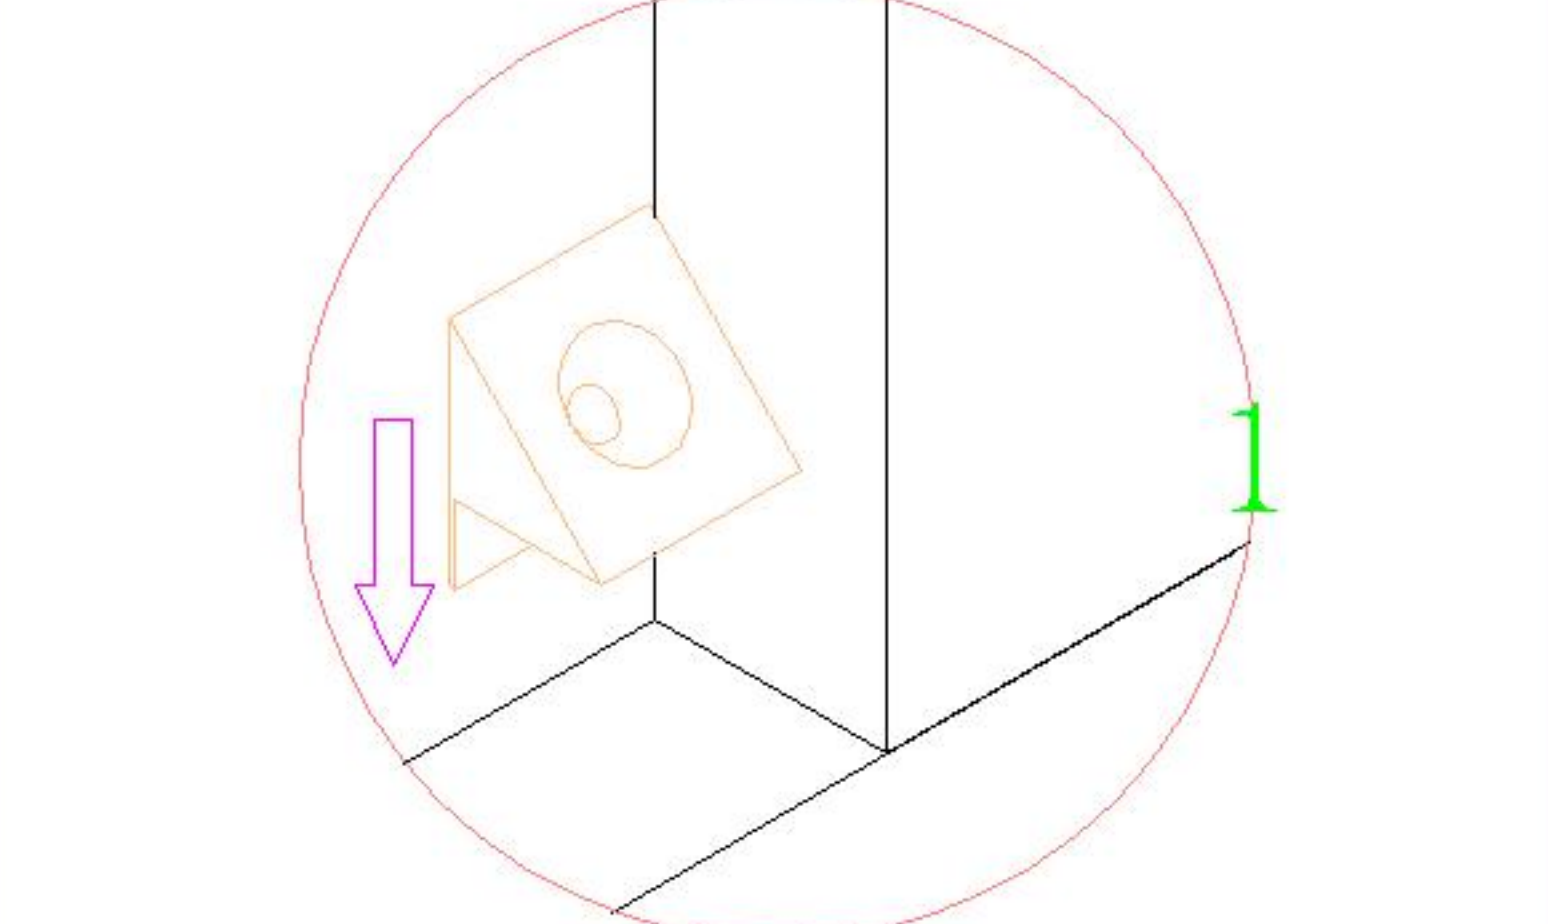


背板扣
Back Plate Buckle-White




(B)*6



(C)*6



(S)*8

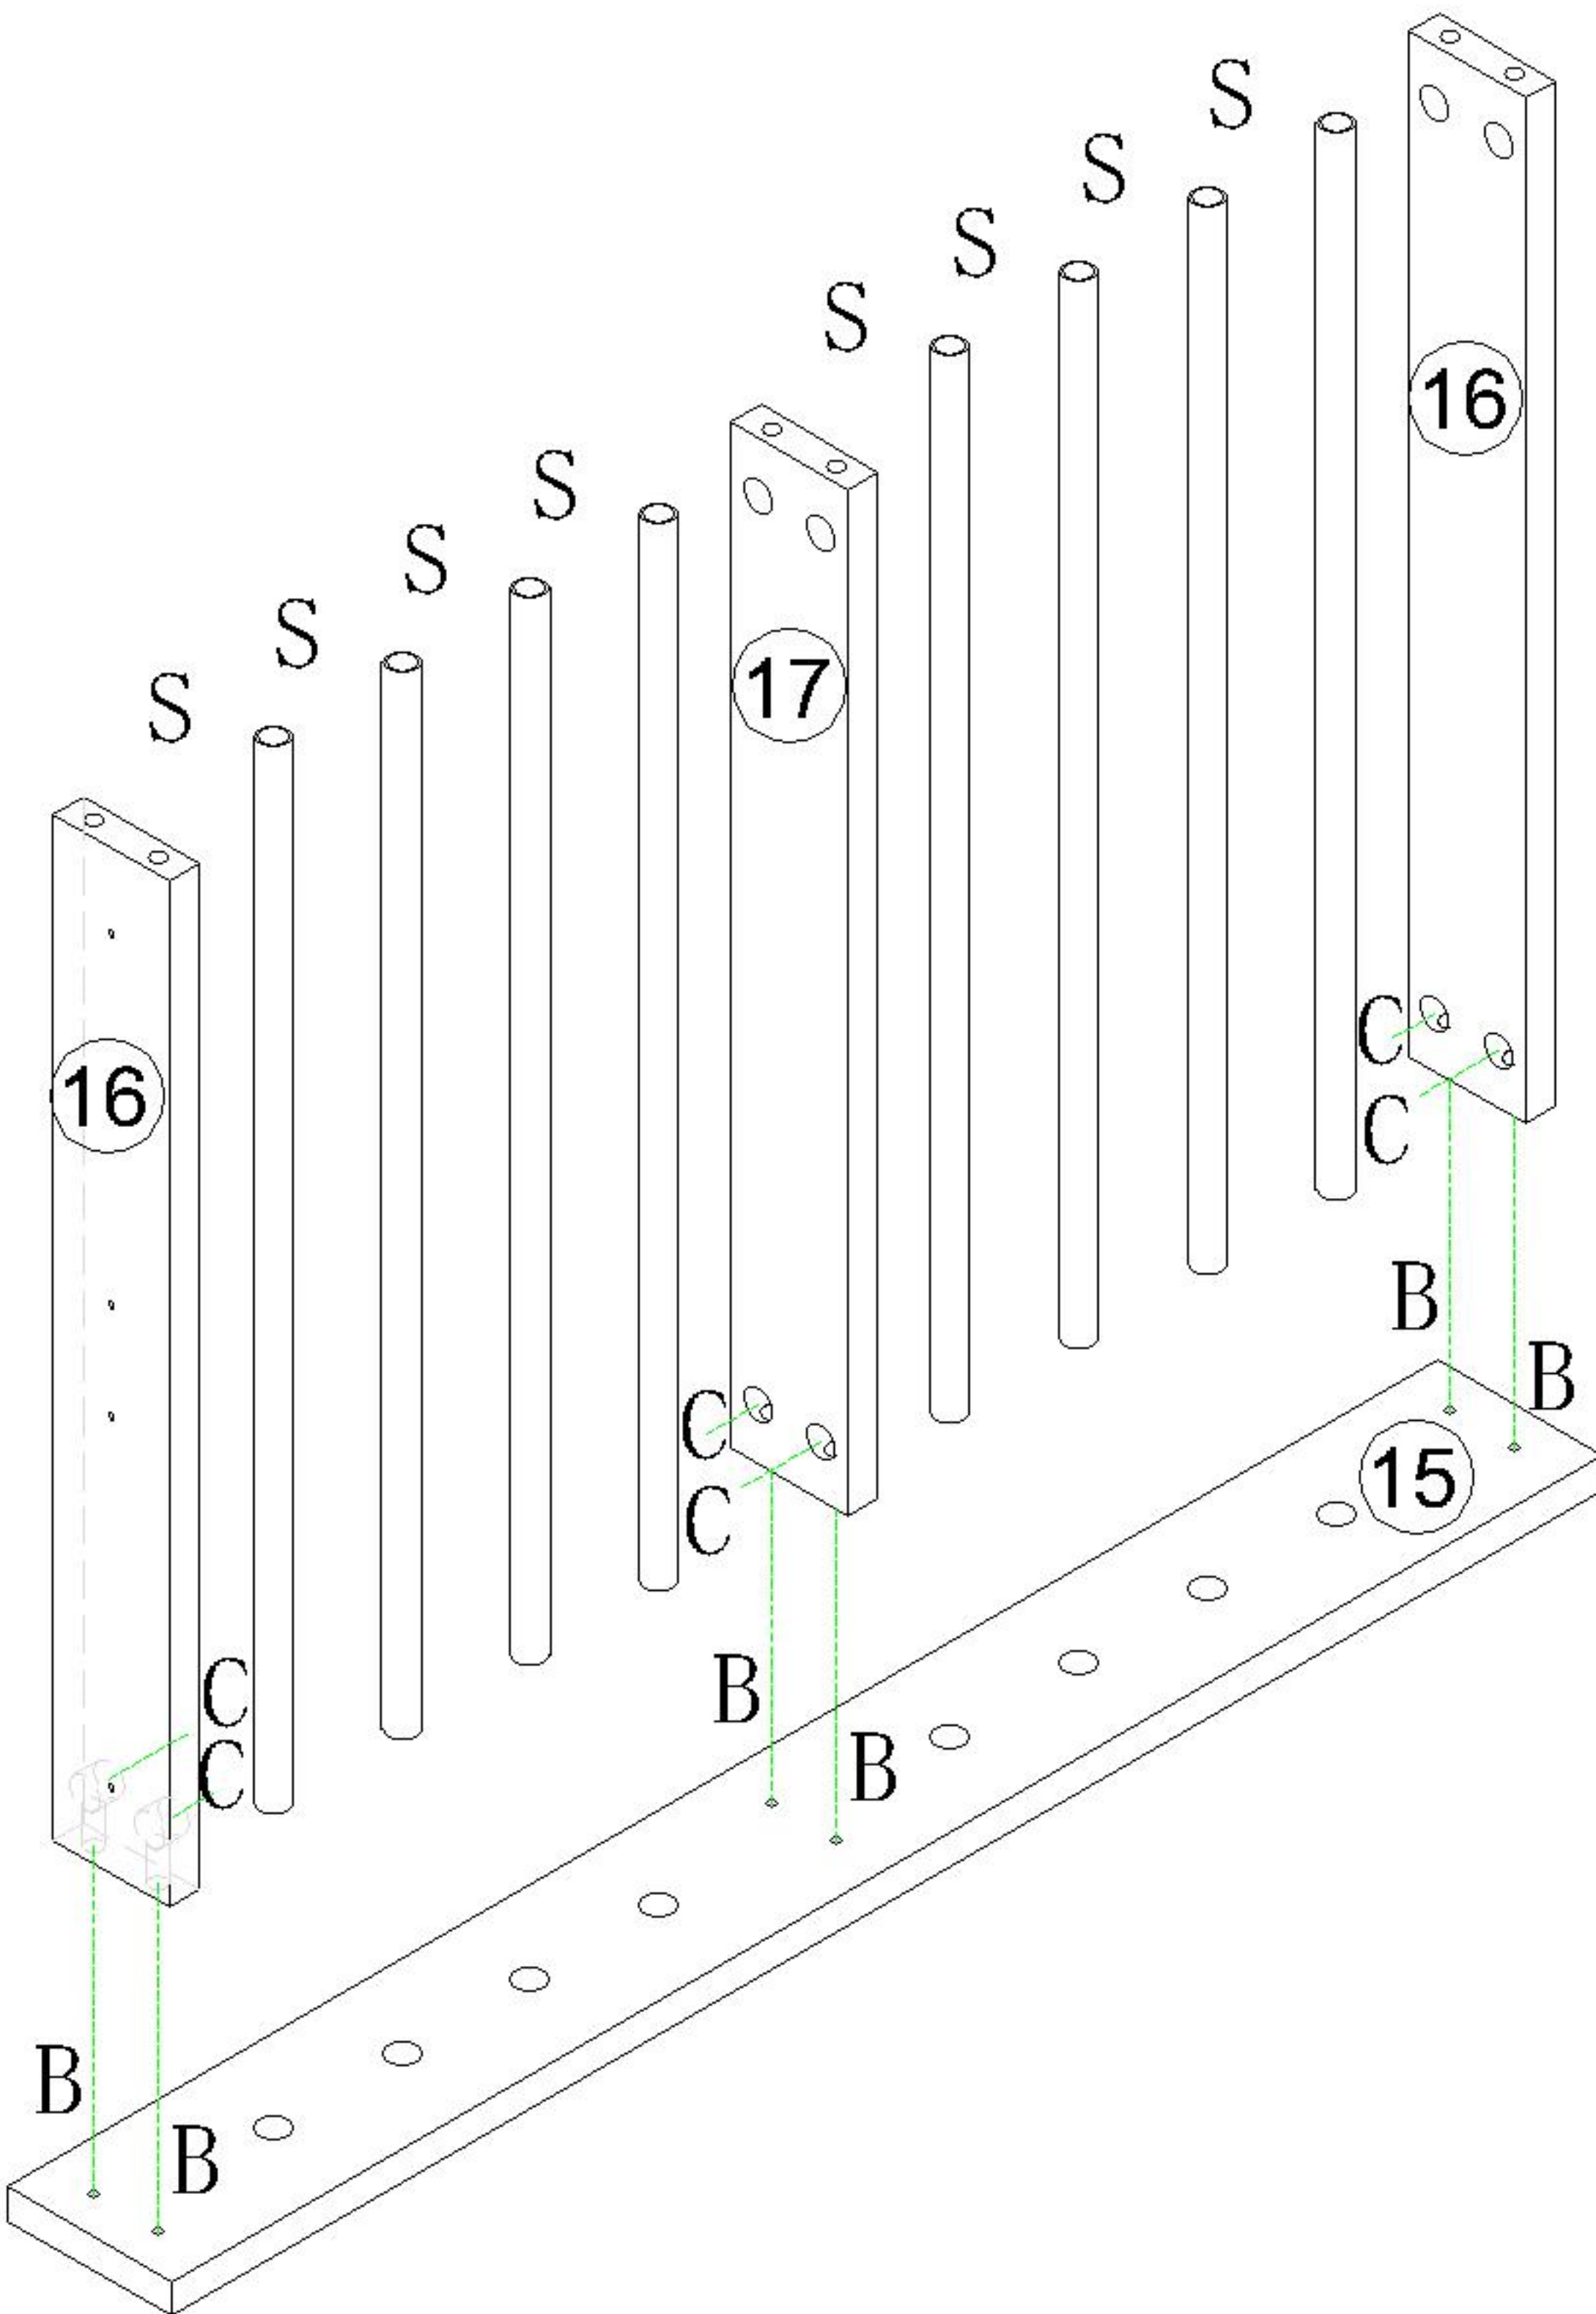


(B)*2




(C)*2



(M)*8

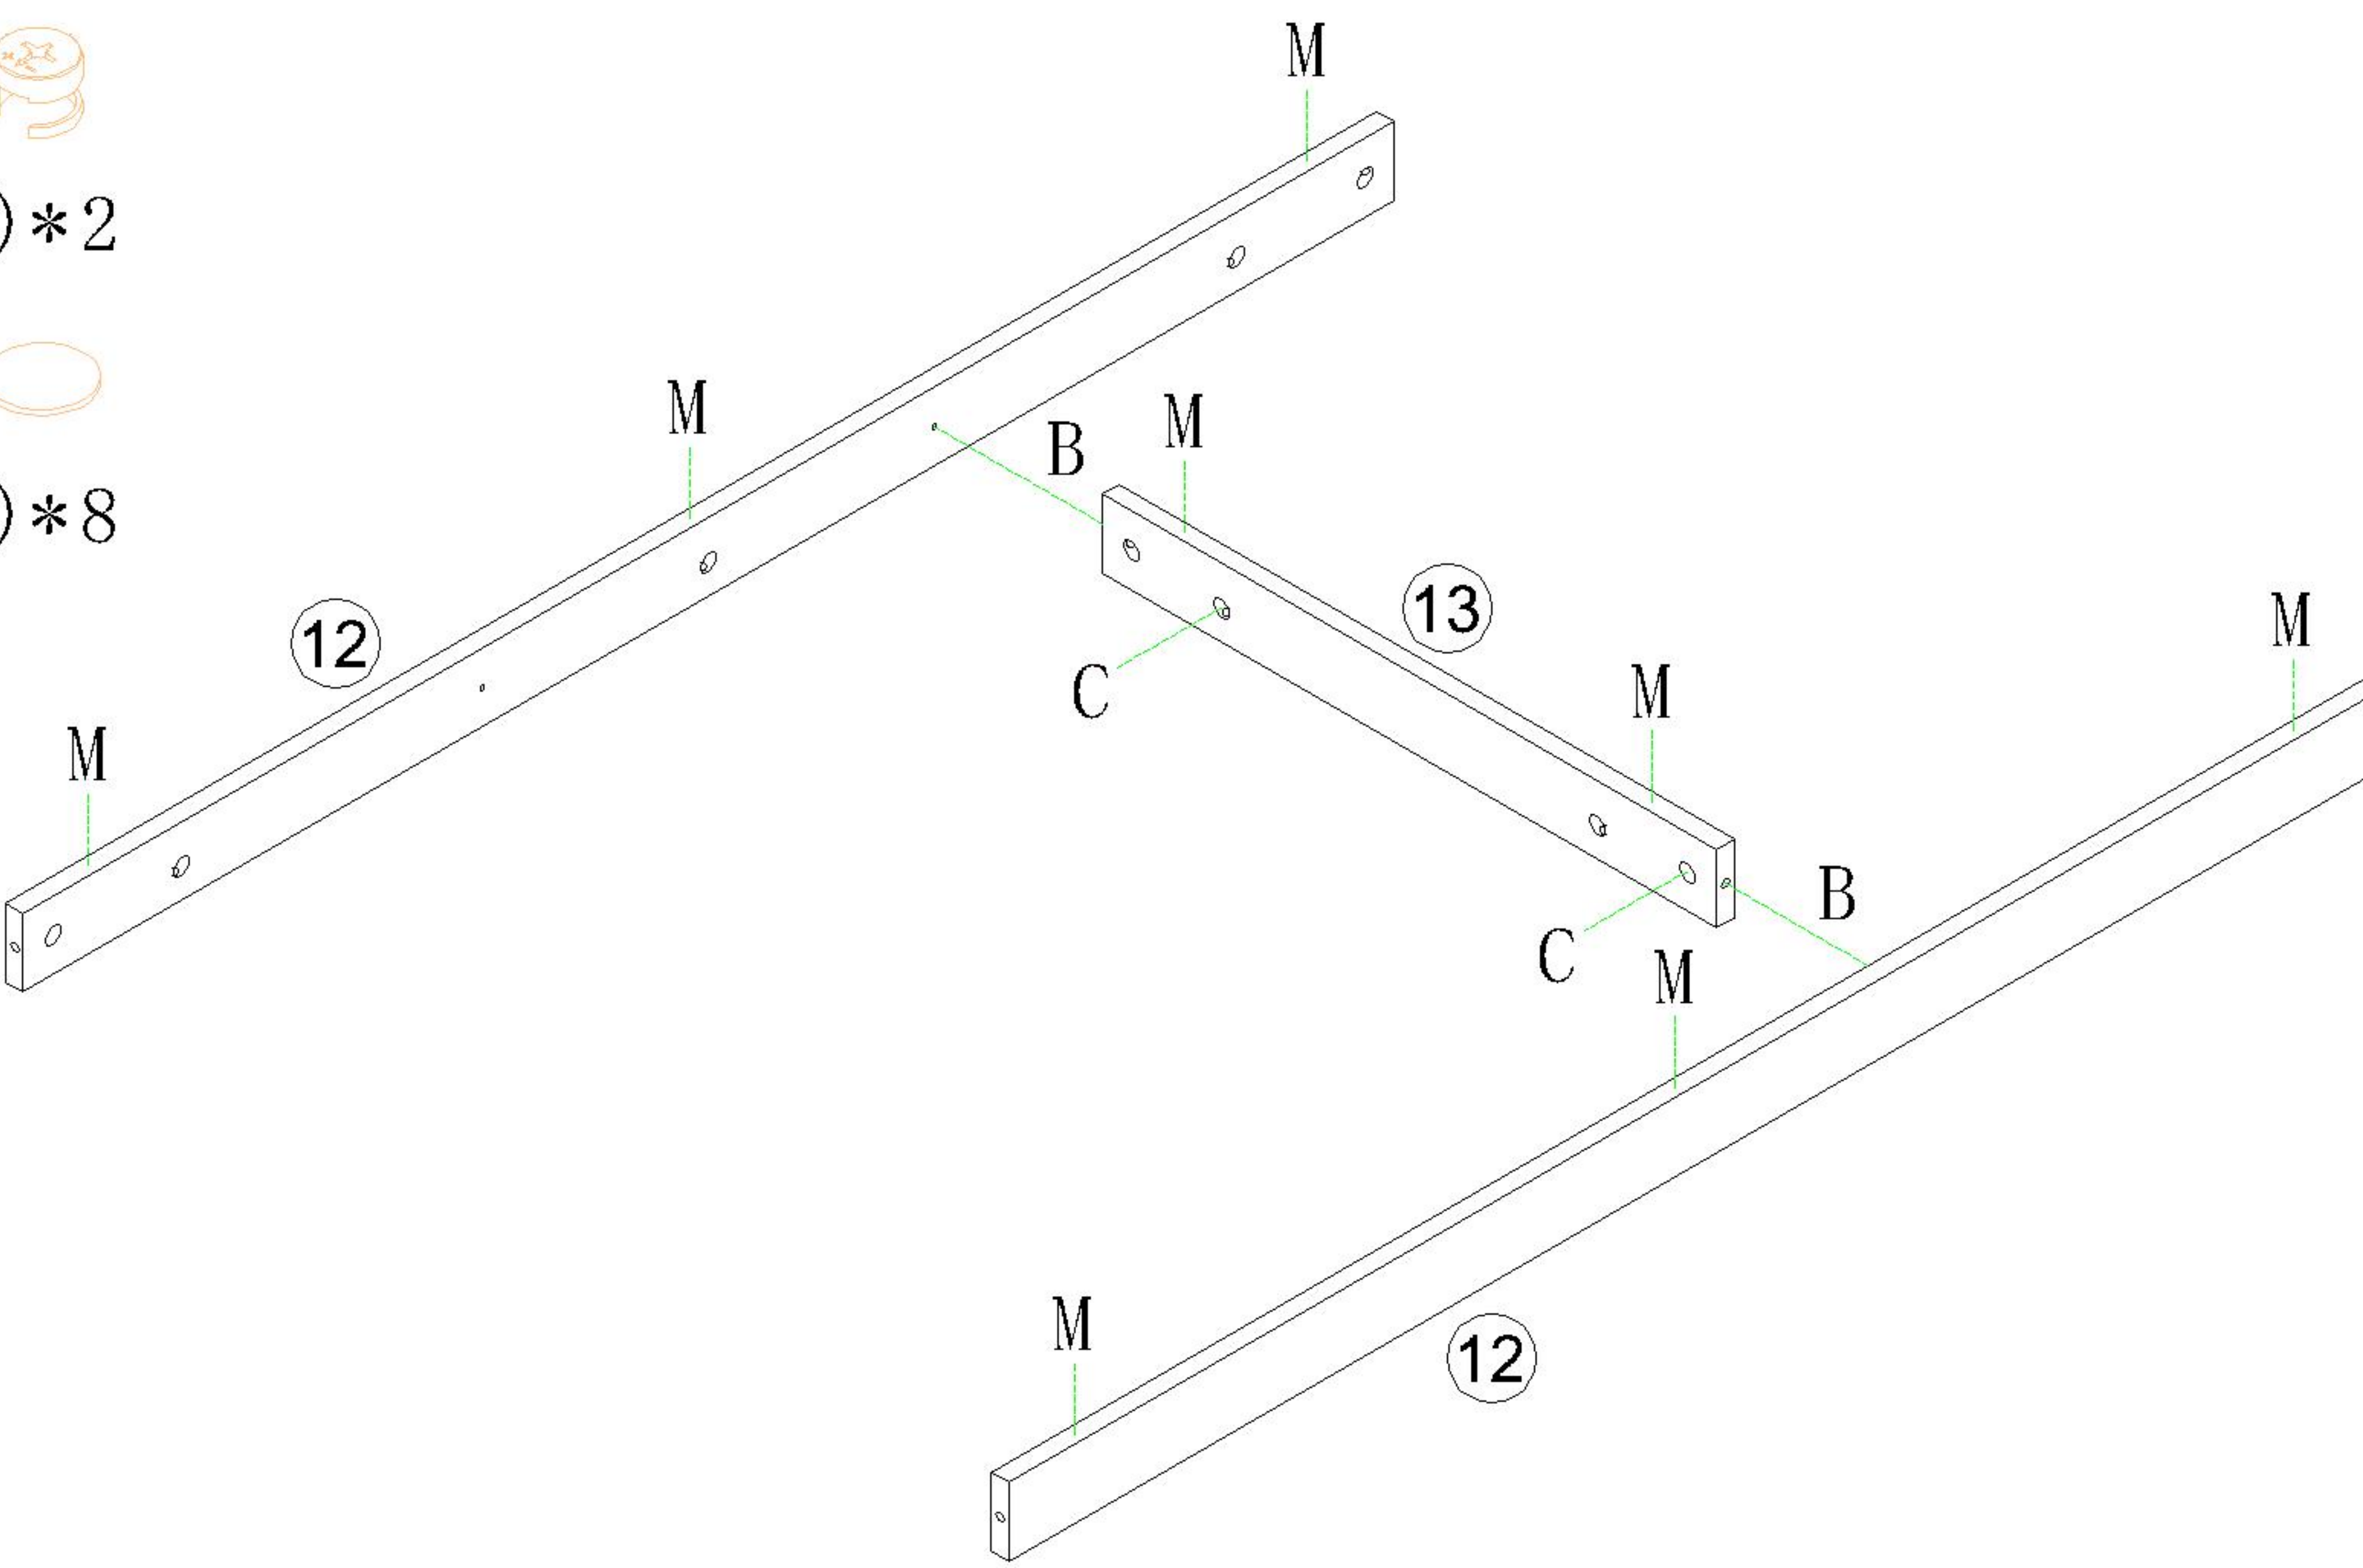

1



(A)*8



(B)*6




(C)*6



(T)*1

(T) 副轨
Sub rail

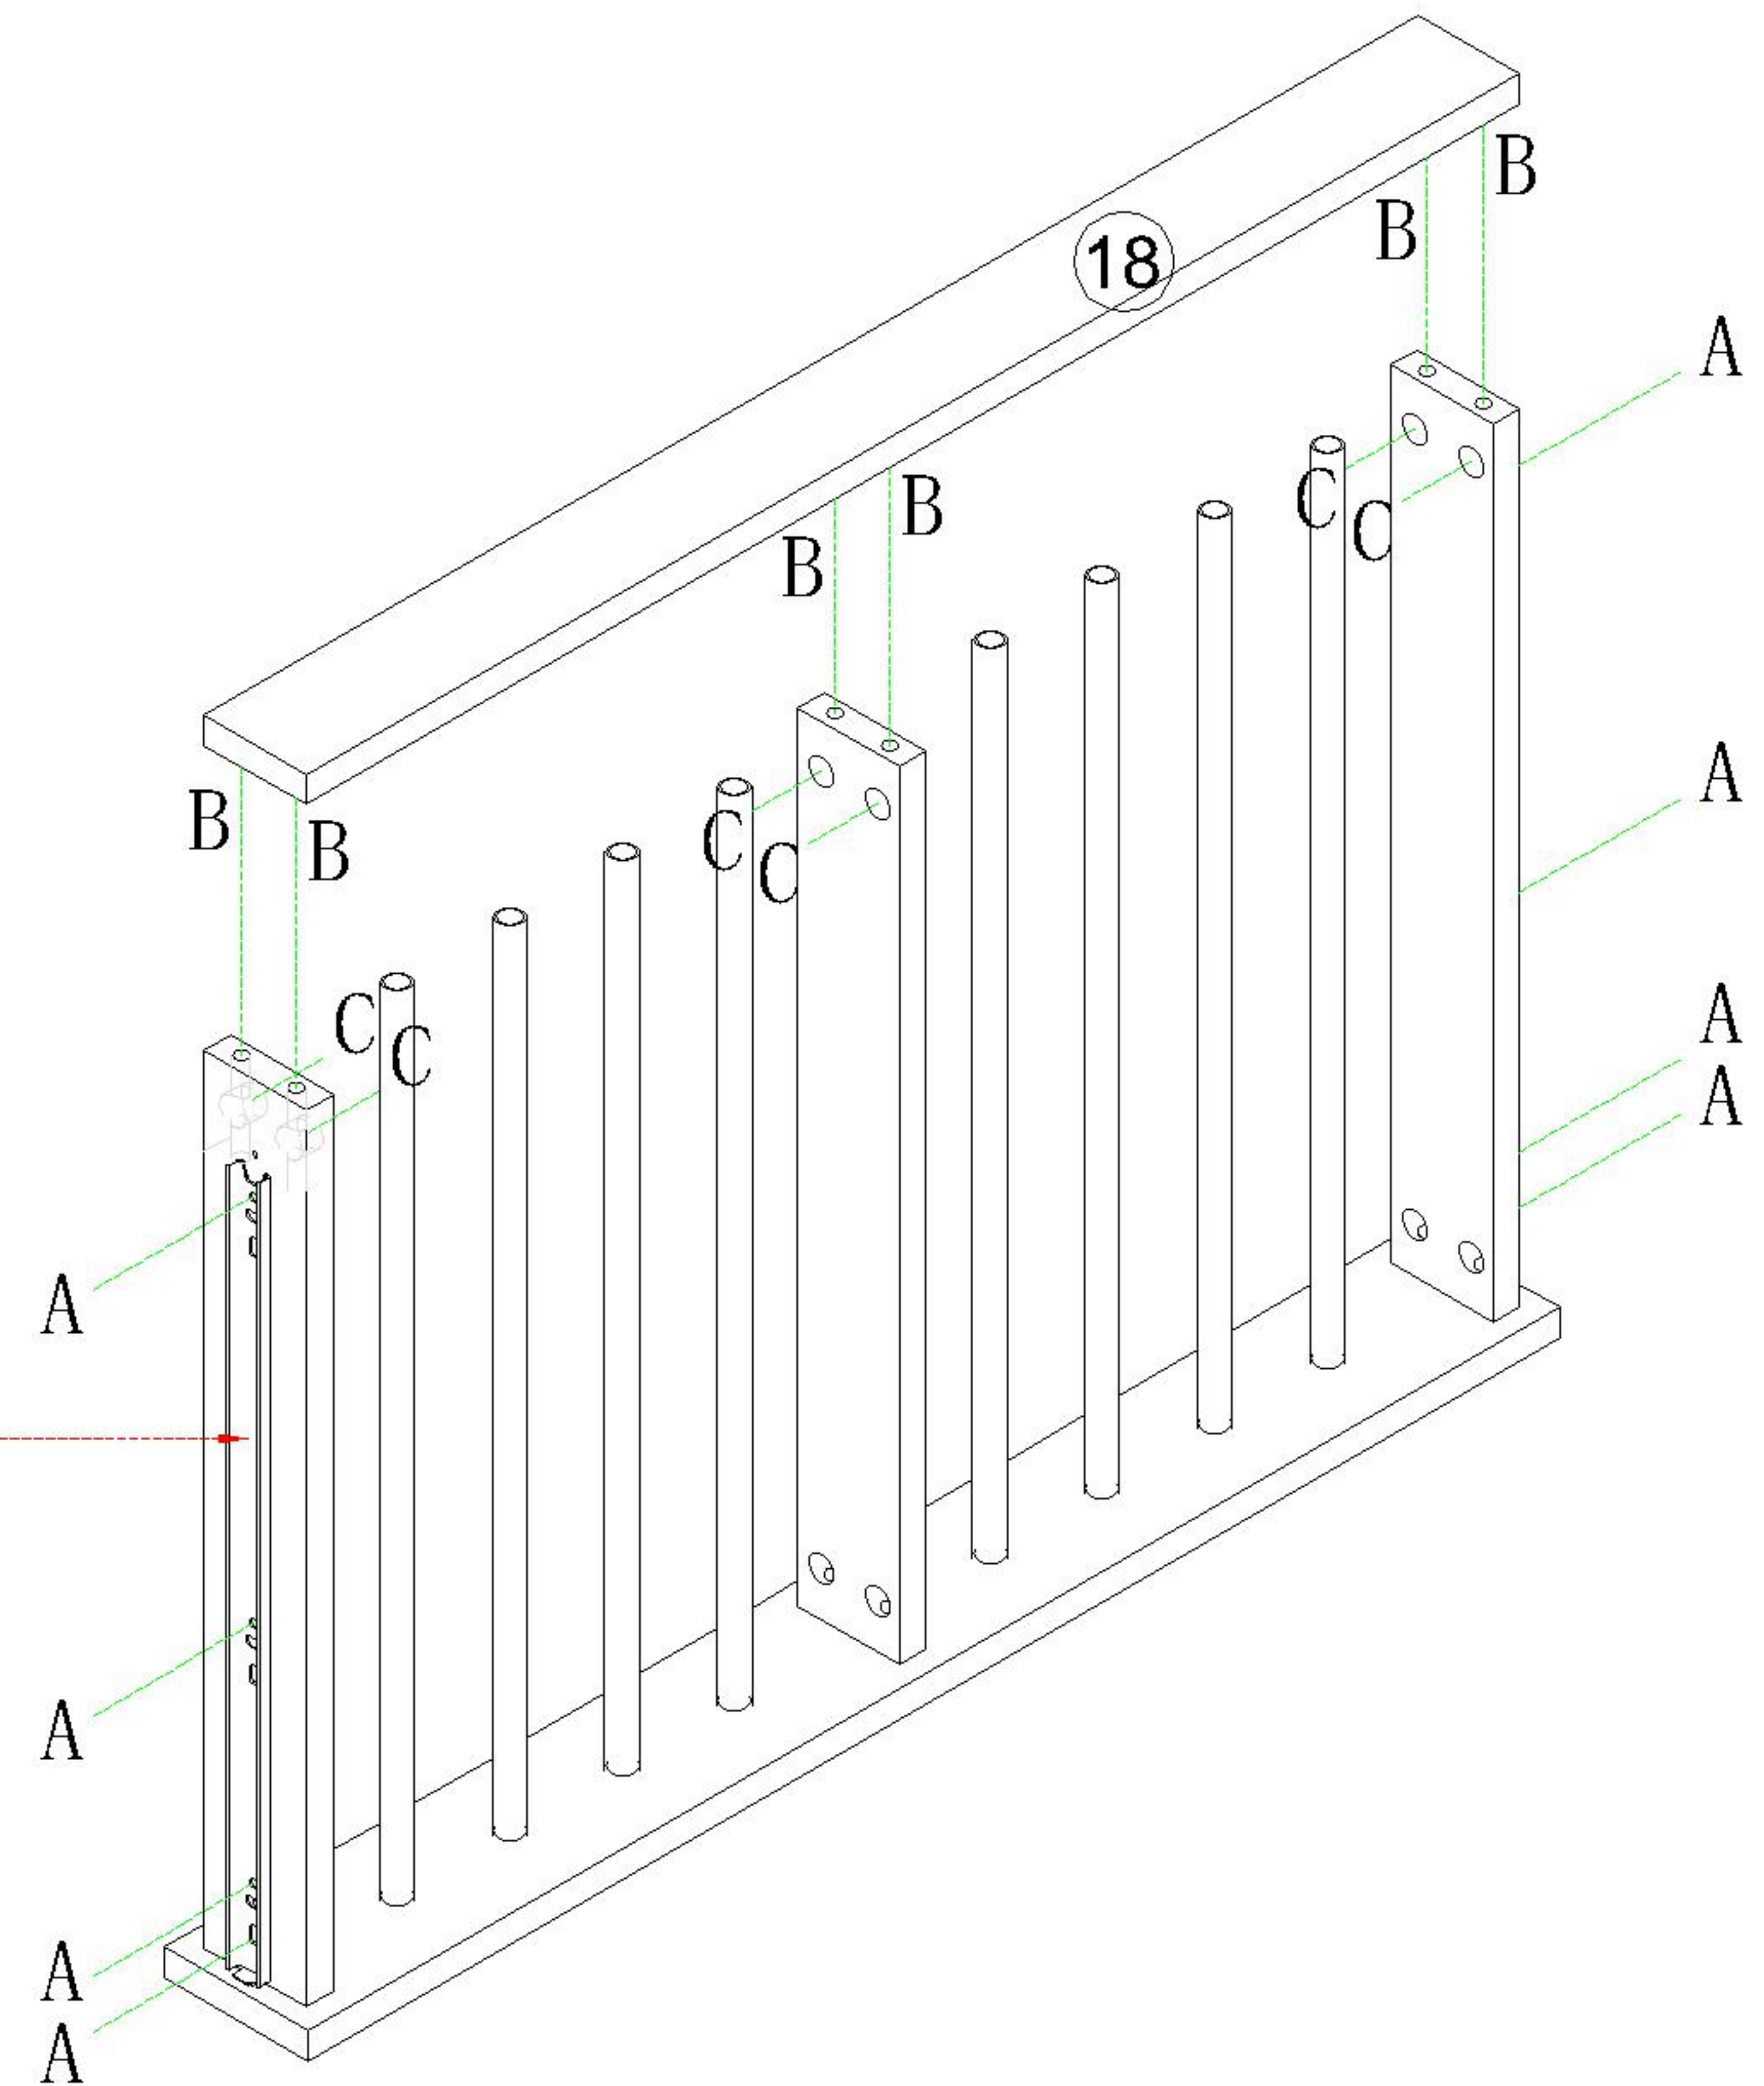

2


3



(B)*8



(C)*8

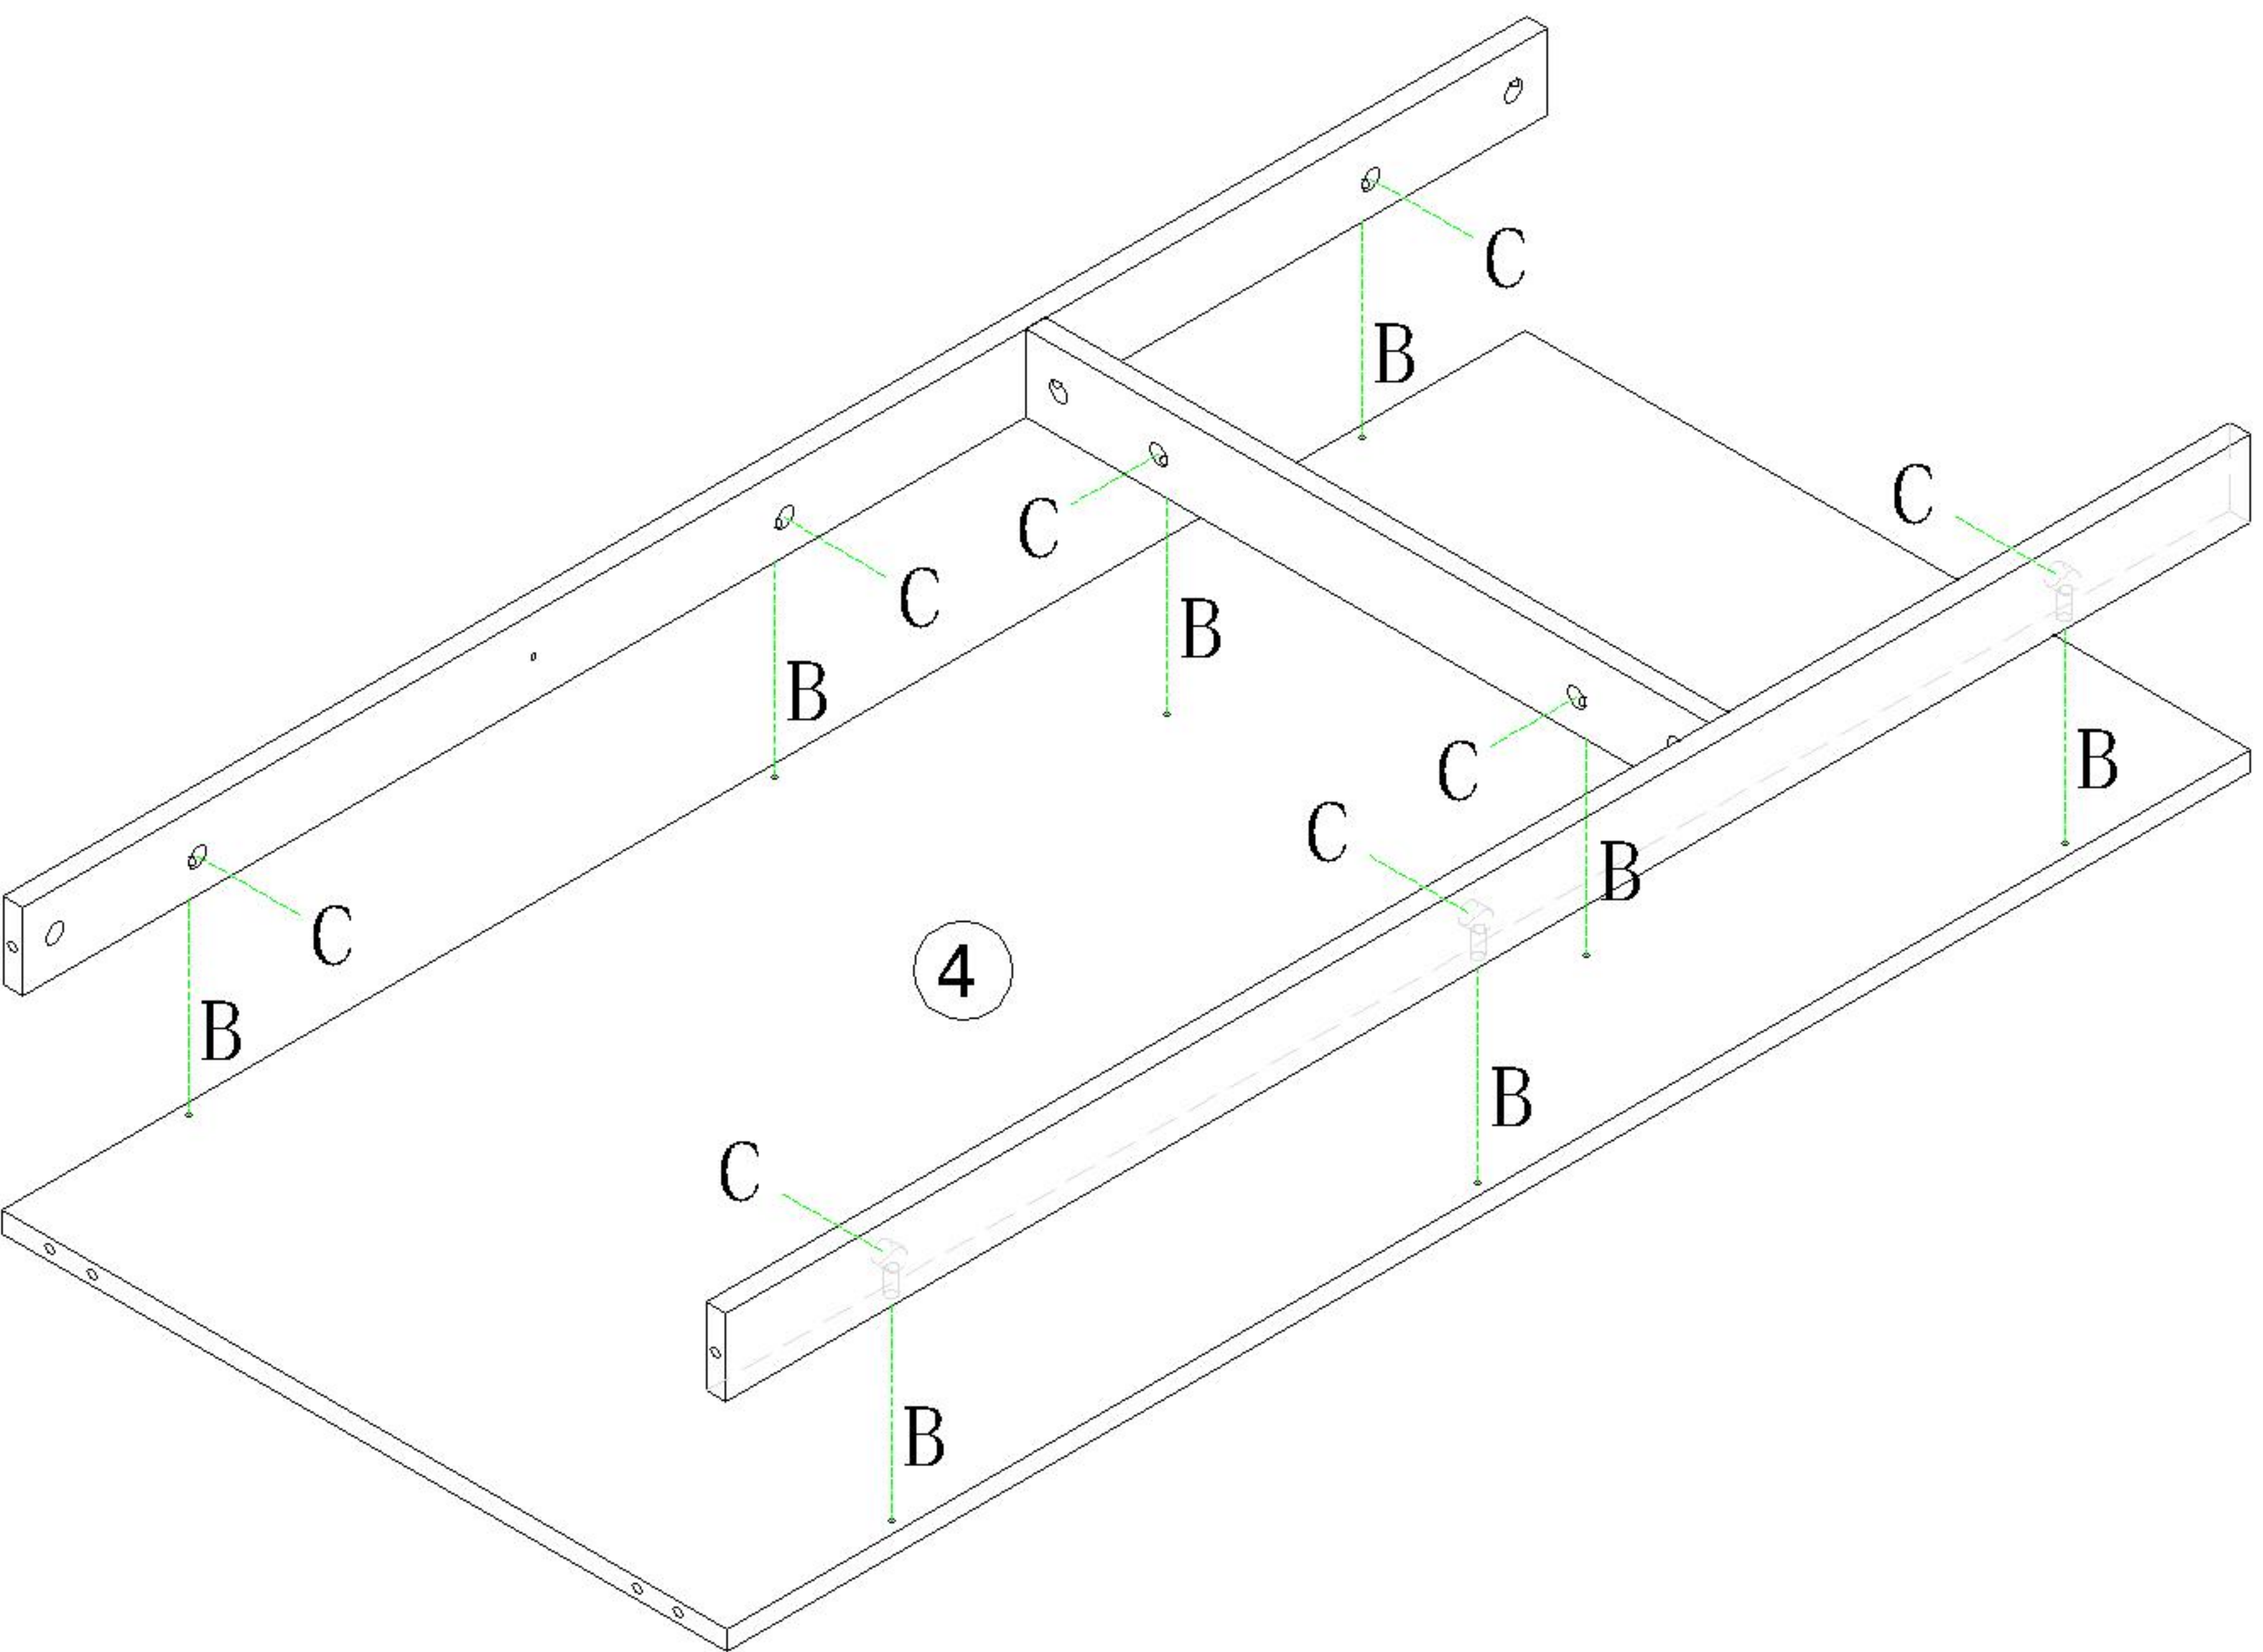


4

T02D-A1




安装方法/ Installation method

阀门开关(下压为开)
Valve switch
(press down to open)

1

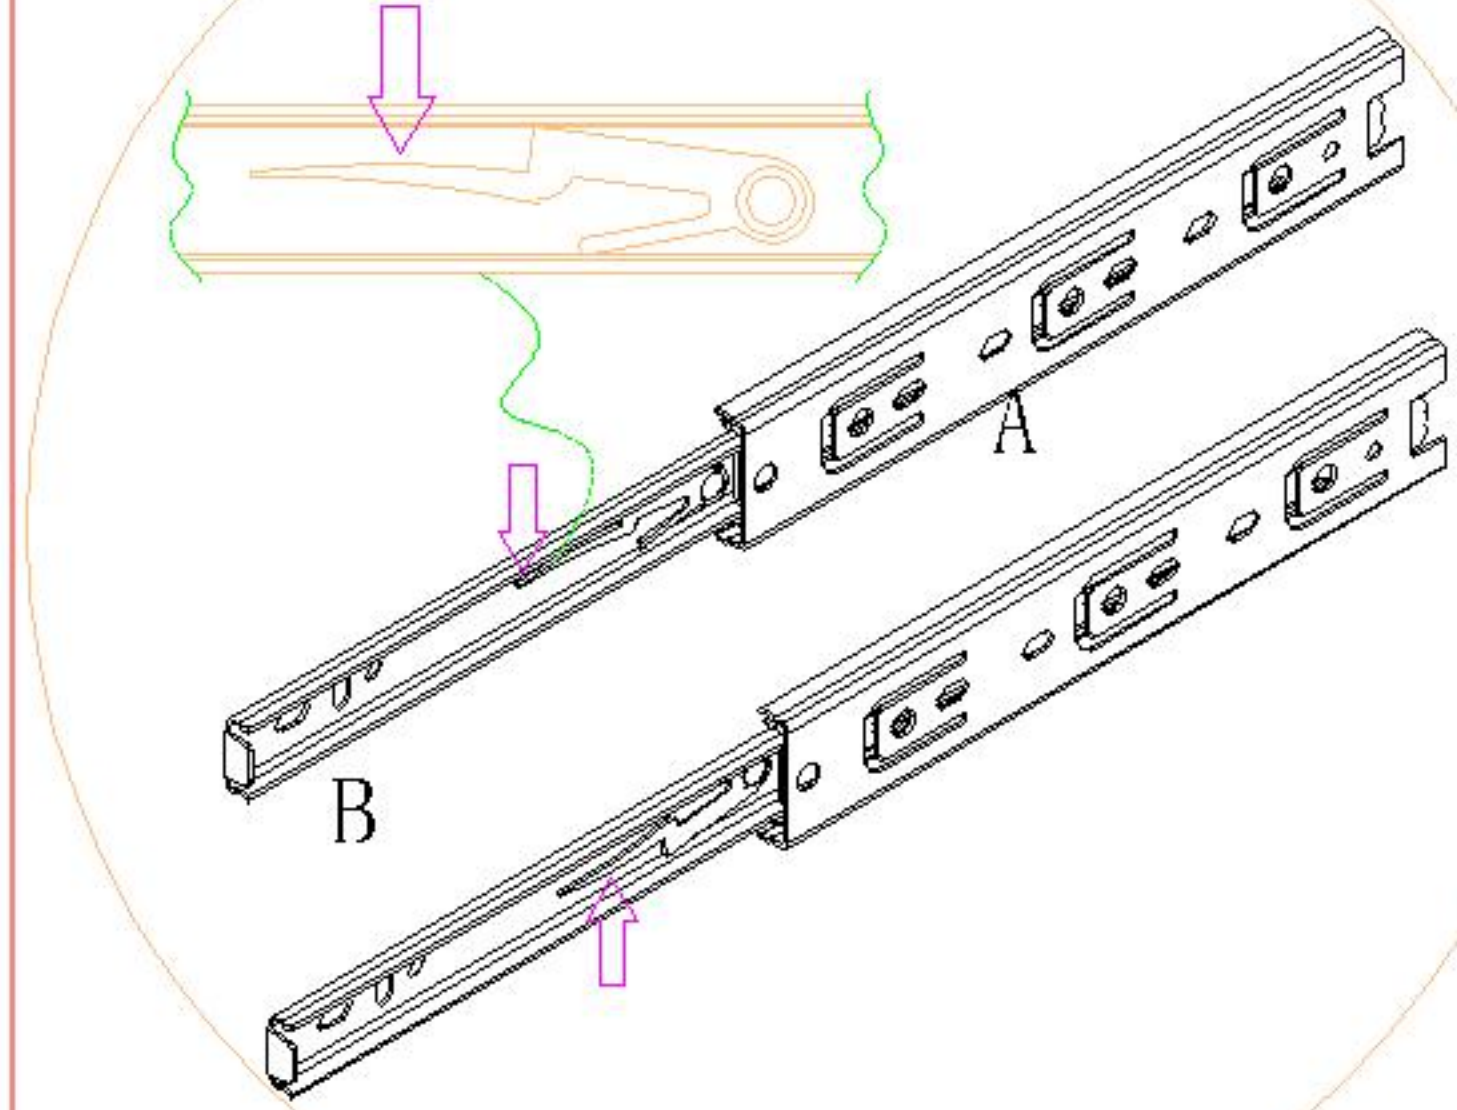

注: 先将A与B拆下来
Note: remove a and B first

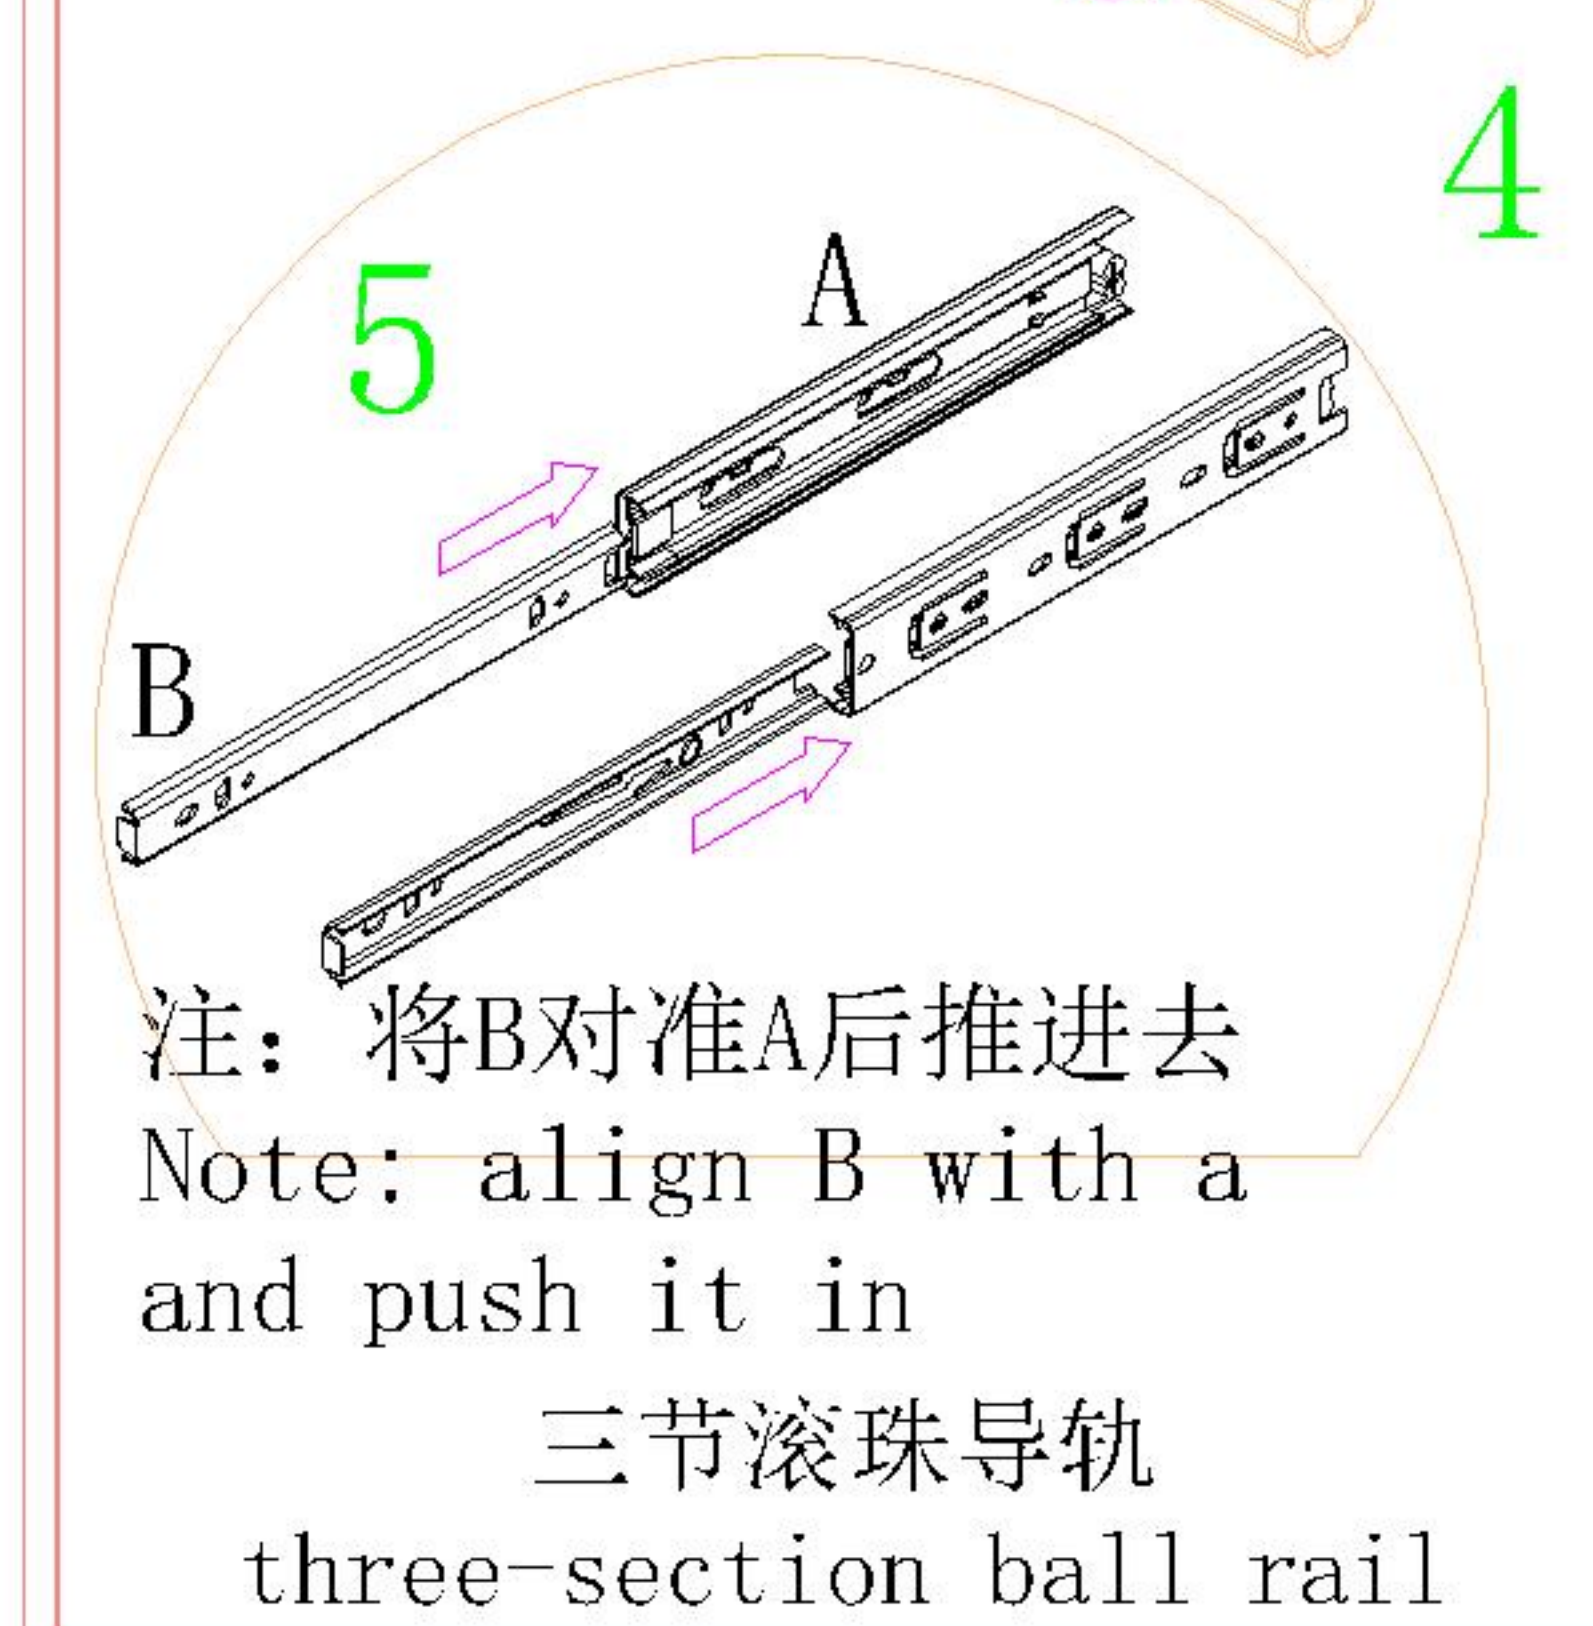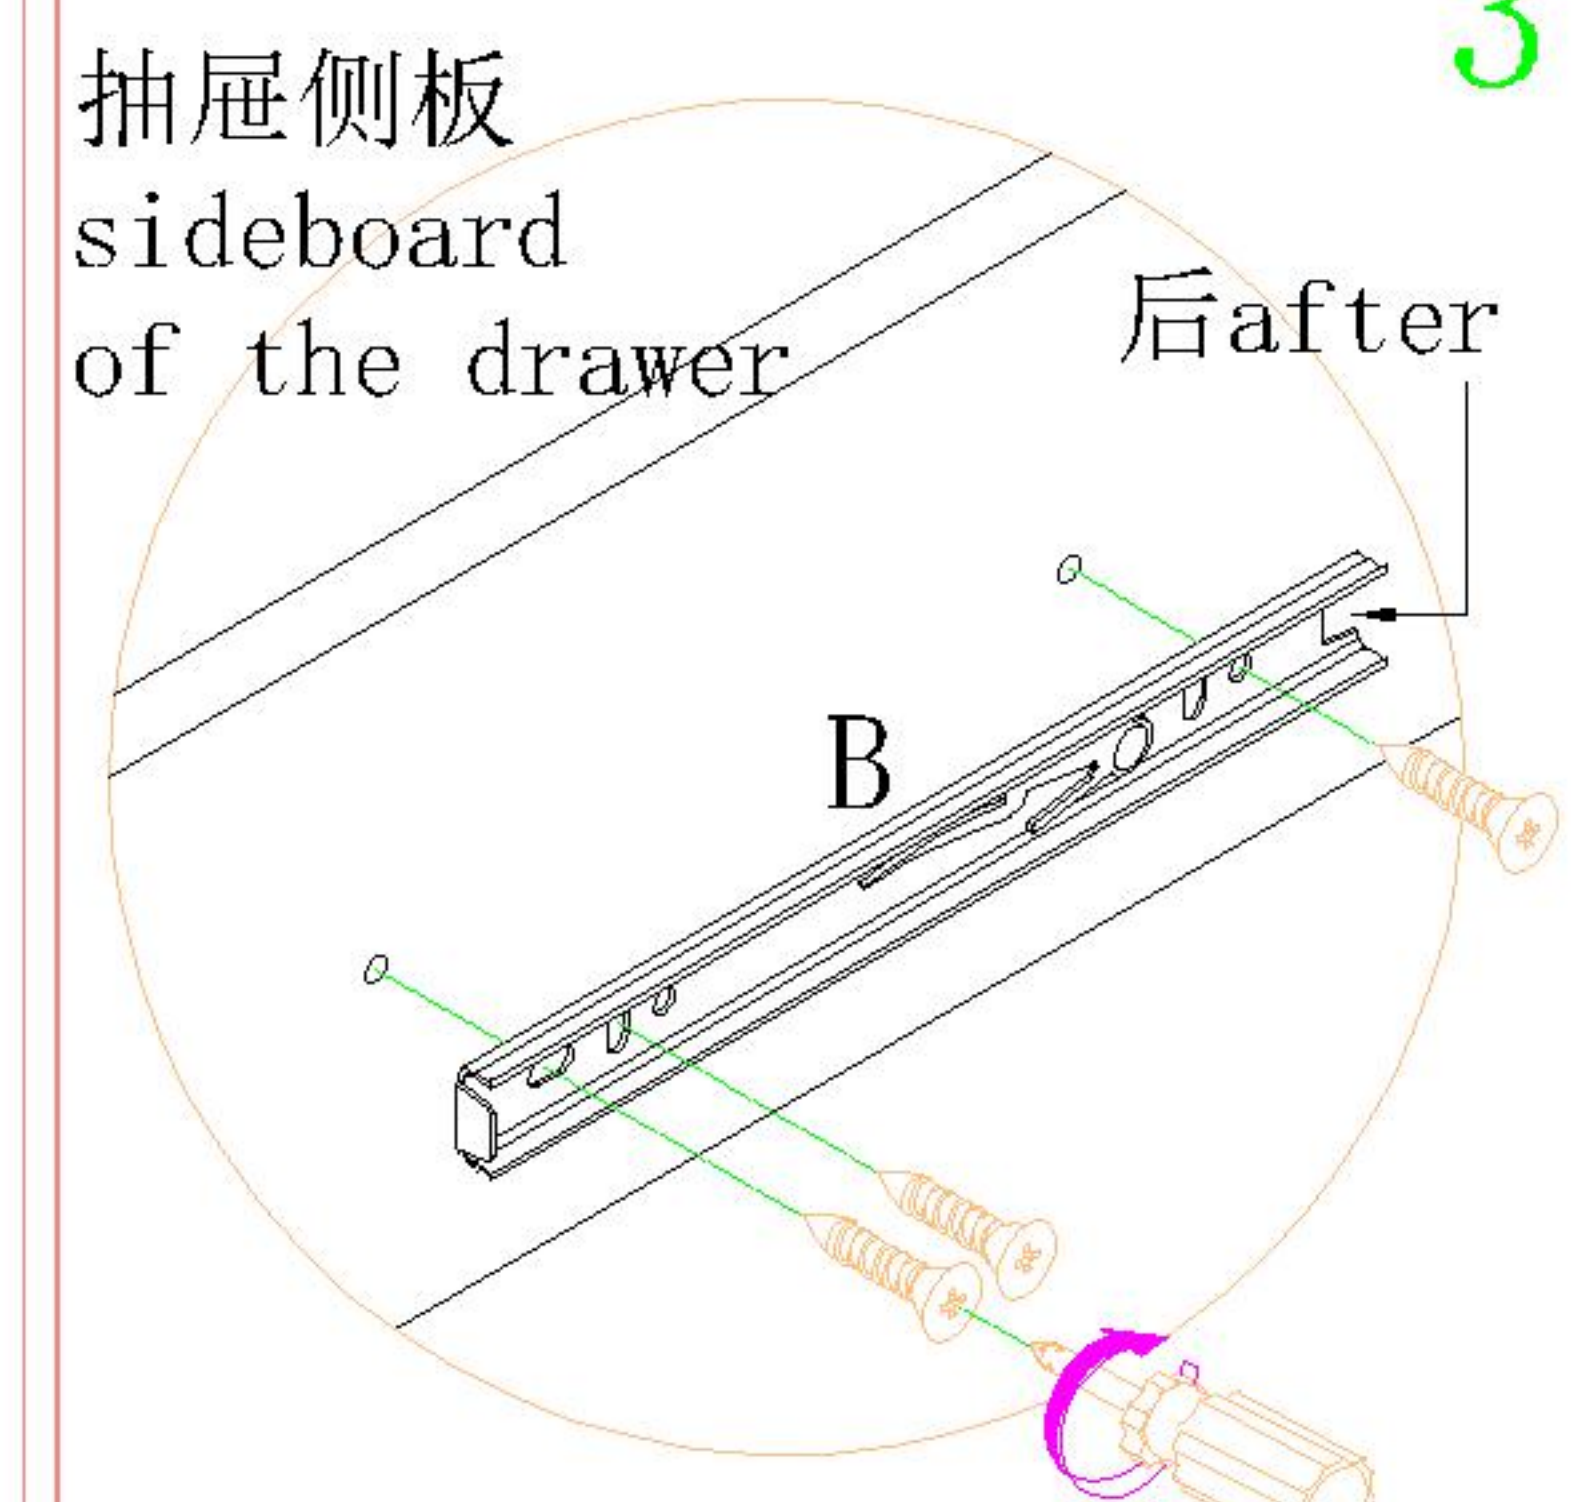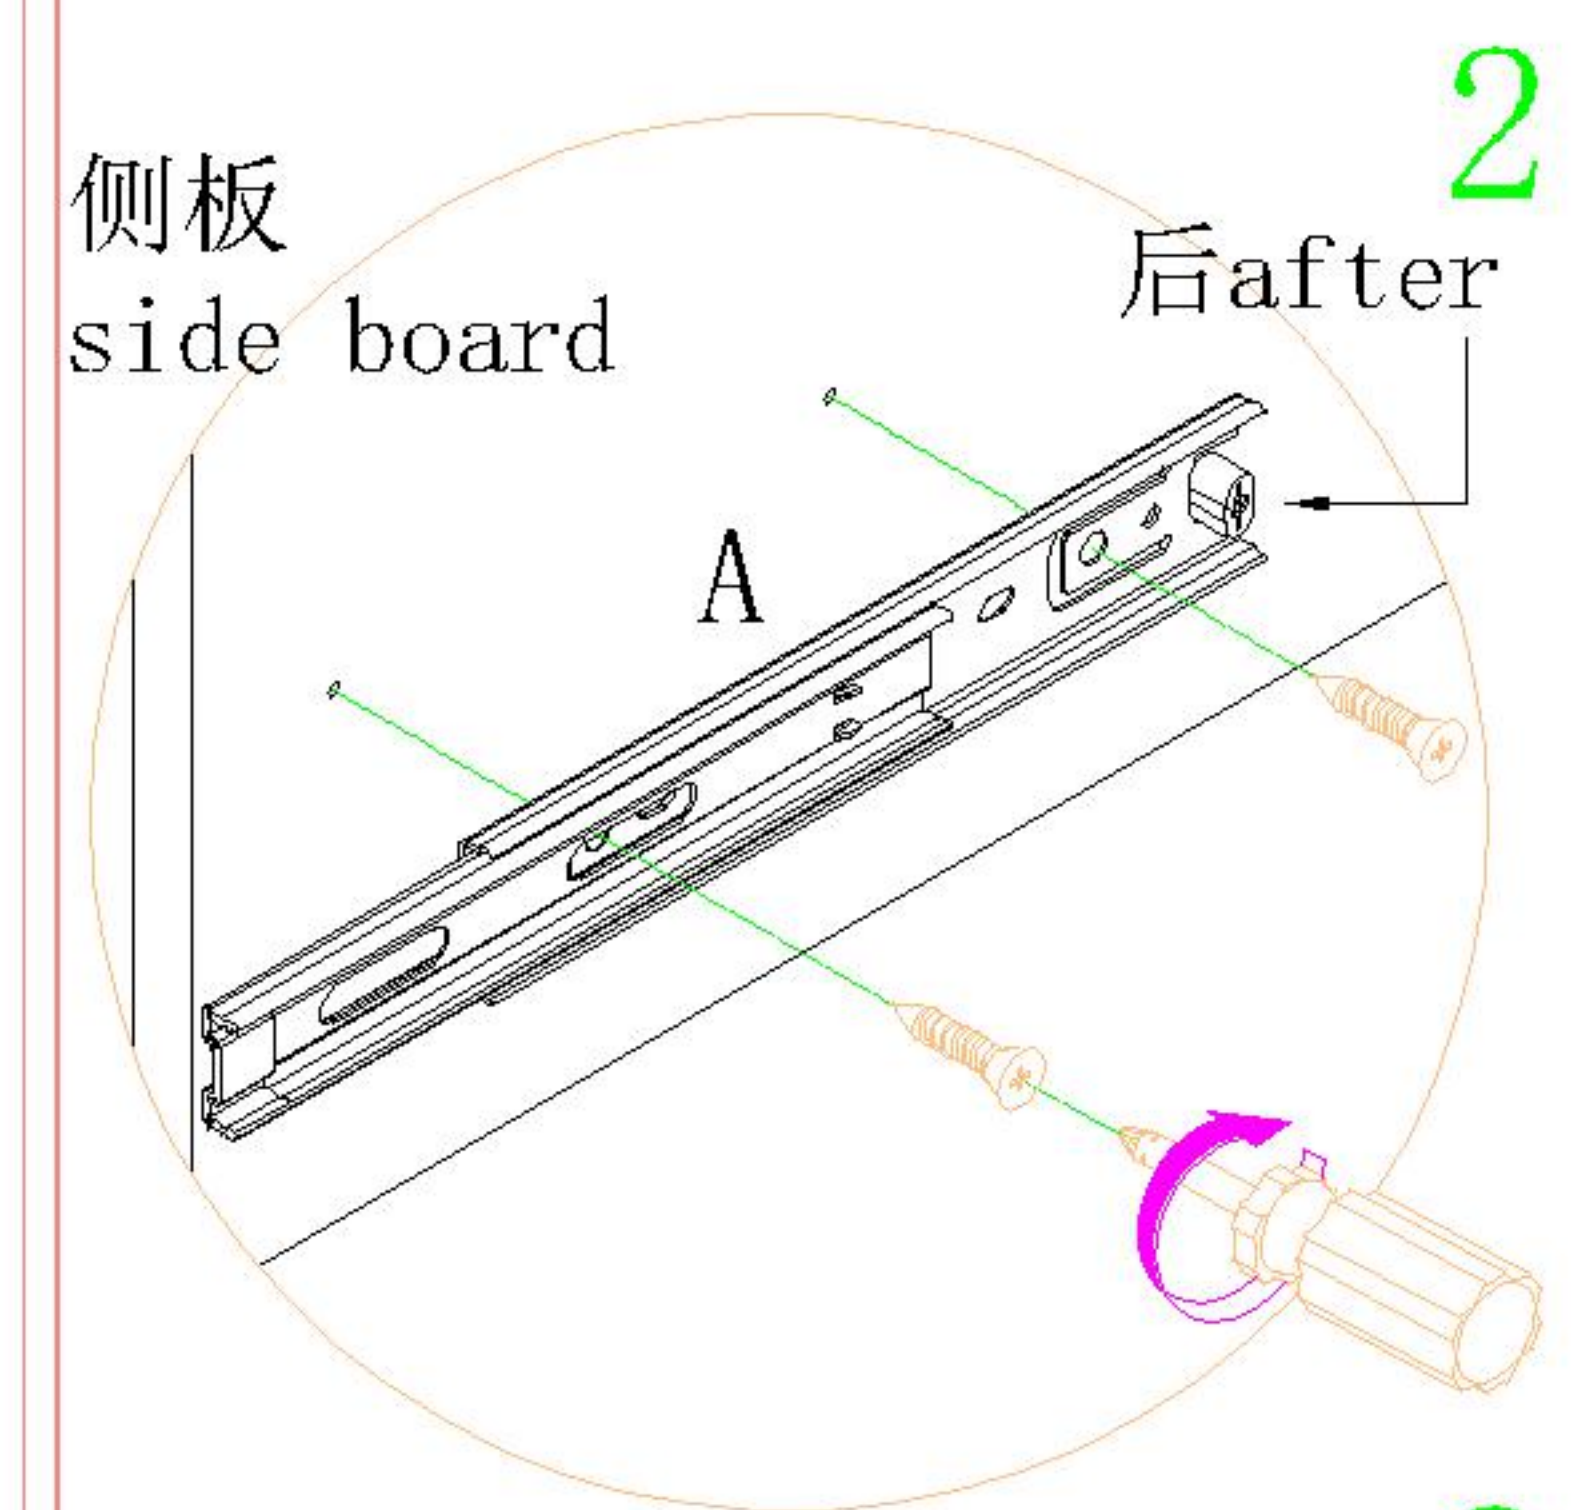

注: 将B对准A后推进去
Note: align B with a
and push it in

三节滚珠导轨
three-section ball rail

(B)*8

(C)*8

(E)*2

(N)*2

(O)*1

(I)*2

(M)*2

(D)*10

(F)*10

(G)*10

(H)*10

(J)*10

(K)*10

(L)*10

(P)*10

(Q)*10

(R)*10

(S)*10

(T)*10

(U)*10

(V)*10

(W)*10

(X)*10

(Y)*10

(Z)*10

(AA)*10

(AB)*10

(AC)*10

(AD)*10

(AE)*10

(AF)*10

(AG)*10

(AH)*10

(AI)*10

(AJ)*10

(AK)*10

(AL)*10

(AM)*10

(AN)*10

(AO)*10

(AP)*10

(AQ)*10

(AR)*10

(AS)*10

(AT)*10

(AU)*10

(AV)*10

(AW)*10

(AX)*10

(AY)*10

(AZ)*10

(BA)*10

(BB)*10

(BC)*10

(BD)*10

(BE)*10

(BF)*10

(BG)*10

(BH)*10

(BI)*10

(BJ)*10

(BK)*10

(BL)*10

(BM)*10

(BN)*10

(BO)*10

(BP)*10

(BQ)*10

(BR)*10

(BS)*10

(BT)*10

(BU)*10

(BV)*10

(BW)*10

(BX)*10

(BY)*10

(BZ)*10

(CA)*10

(CB)*10

(CC)*10

(CD)*10

(CE)*10

(CF)*10

(CG)*10

(CH)*10

(CI)*10

(CJ)*10

(CK)*10

(CL)*10

(CM)*10

(CN)*10

(CO)*10

(CP)*10

(CQ)*10

(CR)*10

(CS)*10

(CT)*10

(CU)*10

(CV)*10

(CW)*10

(CX)*10

(CY)*10

(CZ)*10

(DA)*10

(DB)*10

(DC)*10

(DD)*10

(DE)*10

(DF)*10

(DG)*10

(DH)*10

(DI)*10

(DJ)*10

(DK)*10

(DL)*10

(DM)*10

(DN)*10

(DO)*10

(DP)*10

(DQ)*10

(DR)*10

(DS)*10

(DT)*10

(DU)*10

(DV)*10

(DW)*10

(DX)*10

(DY)*10

(DZ)*10

(EA)*10

(EB)*10

(EC)*10

(ED)*10

(EE)*10

(EF)*10

(EG)*10

(EH)*10

(EI)*10

(EJ)*10

(EK)*10

(EL)*10

(EM)*10

(EN)*10

(EO)*10

(EP)*10

(EQ)*10

(ER)*10

(ES)*10

(ET)*10

(EU)*10

(EV)*10

(EW)*10

(EX)*10

(EY)*10

(EZ)*10

(FA)*10

(FB)*10

(FC)*10

(FD)*10

(FE)*10

(FF)*10

(FG)*10

(FH)*10

(FI)*10

(FJ)*10

(FK)*10

(FL)*10

(FM)*10

(FN)*10

(FO)*10

(FP)*10

(FQ)*10

(FR)*10

(FS)*10

(FT)*10

(FU)*10

(FV)*10

(FW)*10

(FX)*10

(FY)*10

(FZ)*10

(GA)*10

(GB)*10

(GC)*10

(GD)*10

(GE)*10

(GF)*10

(GG)*10

(GH)*10

(GI)*10

(GJ)*10

(GK)*10

(GL)*10

(GM)*10

(GN)*10

(GO)*10

(GP)*10

(GQ)*10

(GR)*10

(GS)*10

(GT)*10

(GU)*10

(GV)*10

(GW)*10

(GX)*10

(GY)*10

(GZ)*10

(HA)*10

(HB)*10

(HC)*10

(HD)*10

(HE)*10

(HF)*10

(HG)*10

(HH)*10

(HI)*10

(HJ)*10

(HK)*10

(HL)*10

(HM)*10

(HN)*10

(HO)*10

(HP)*10

(HQ)*10

(HR)*10

(HS)*10

(HT)*10

(HU)*10

(HV)*10

(HW)*10

(HX)*10

(HY)*10

(HZ)*10

(IA)*10

(IB)*10

(IC)*10

(ID)*10

(IE)*10

(IF)*10

(IG)*10

(IH)*10

(II)*10

(IJ)*10

(IK)*10

(IL)*10

(IM)*10

(IN)*10

(IO)*10

(IP)*10

(IQ)*10

(IR)*10

(IS)*10

(IT)*10

(IU)*10

(IV)*10

(IW)*10

(IX)*10

(IY)*10

(IZ)*10

(JA)*10

(JB)*10

(JC)*10

(JD)*10

(JE)*10

(JF)*10

(JG)*10

(JH)*10

(JI)*10

(JJ)*10

(JK)*10

(JL)*10

(JM)*10

(JN)*10

(JO)*10

(JP)*10

(JQ)*10

(JR)*10

(JS)*10

(JT)*10

(JU)*10

(JV)*10

(JW)*10

(JX)*10


T02D-A1

安装方法/ Installation method



大弯big bend




中弯middle bending

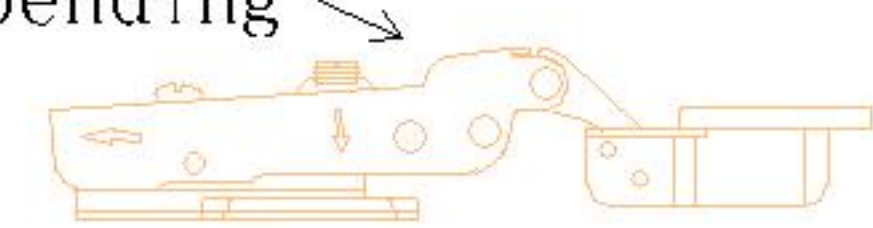


直弯straight bending

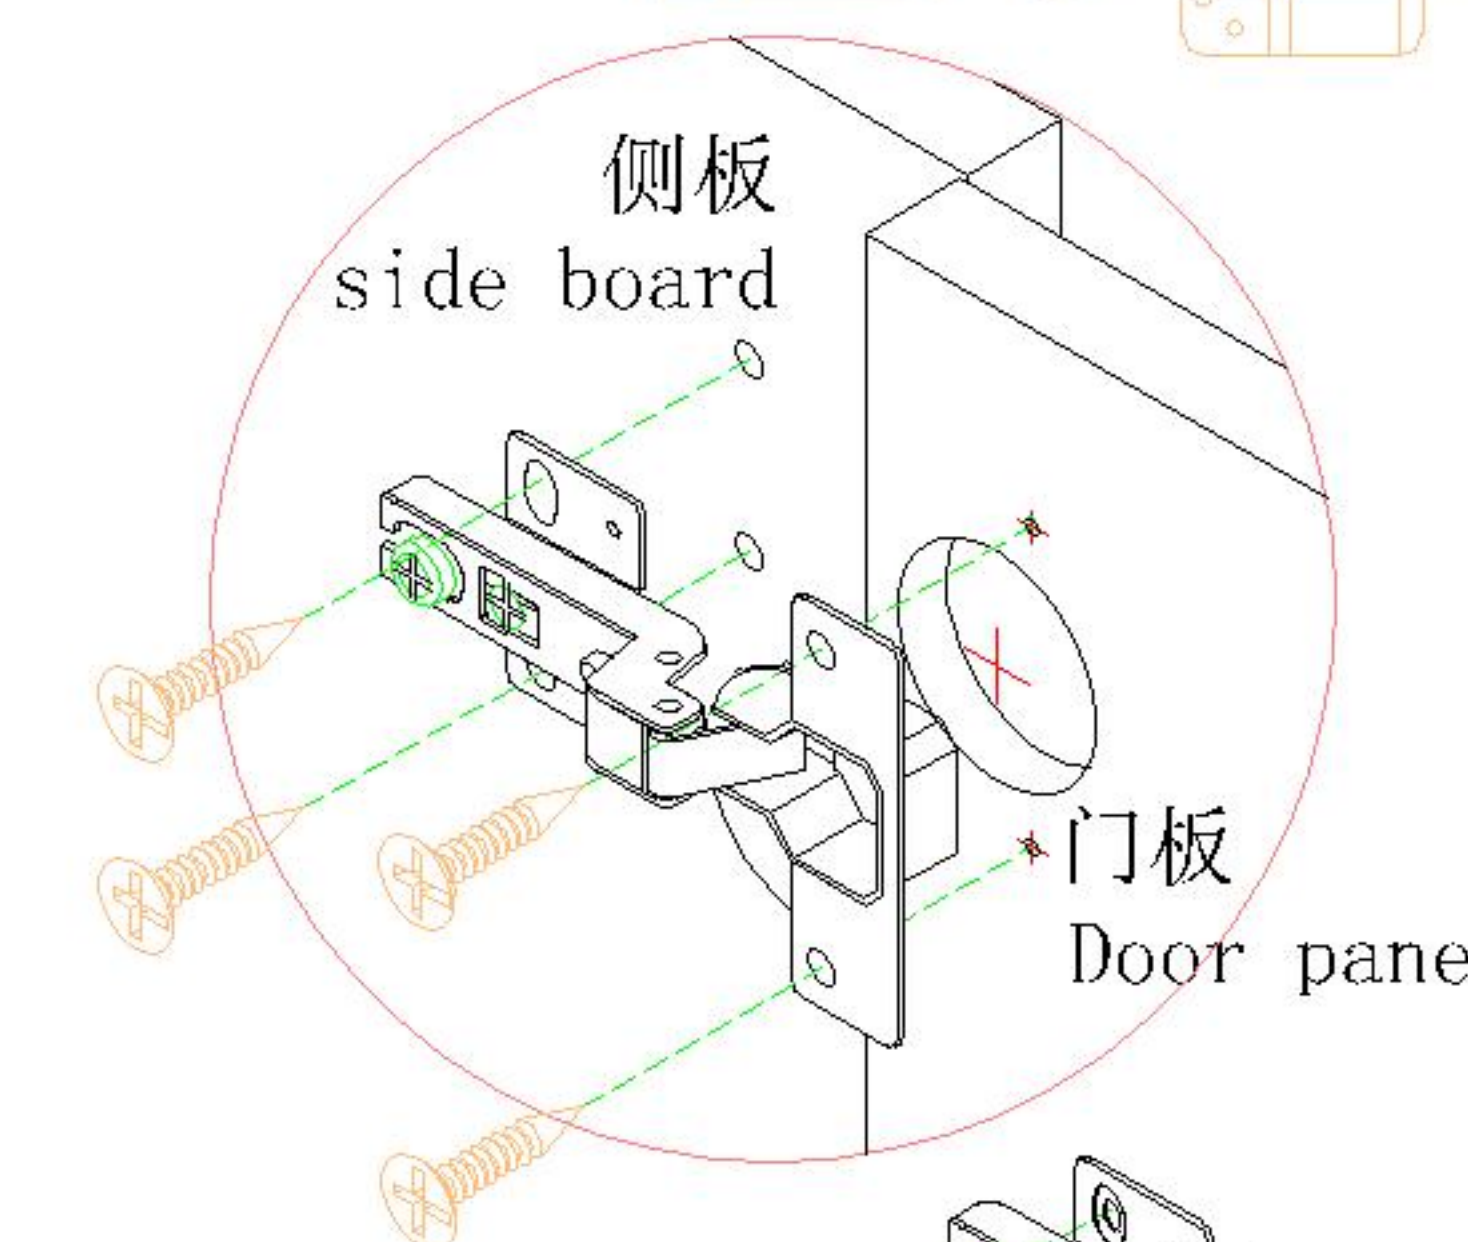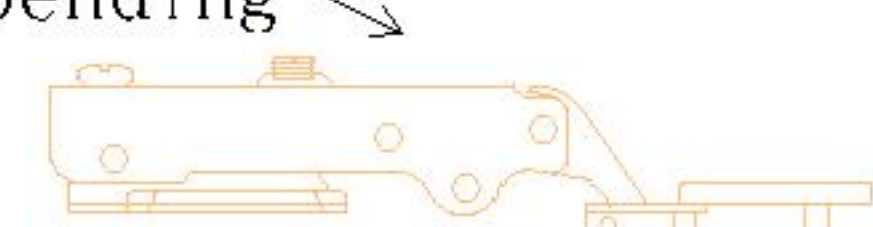


调节上下
Adjust up and down

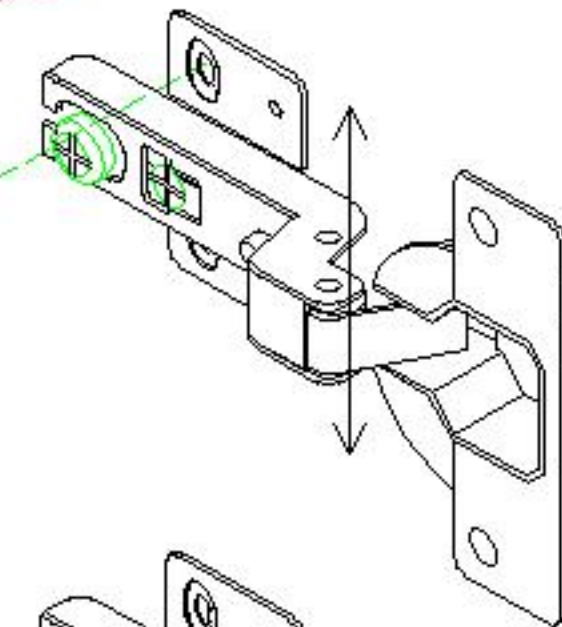


调节左右
Adjust left and right

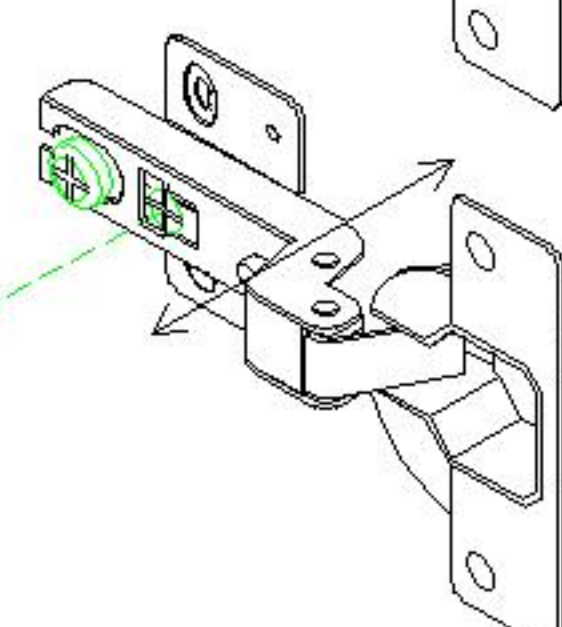


调节前后
Before and after adjustment

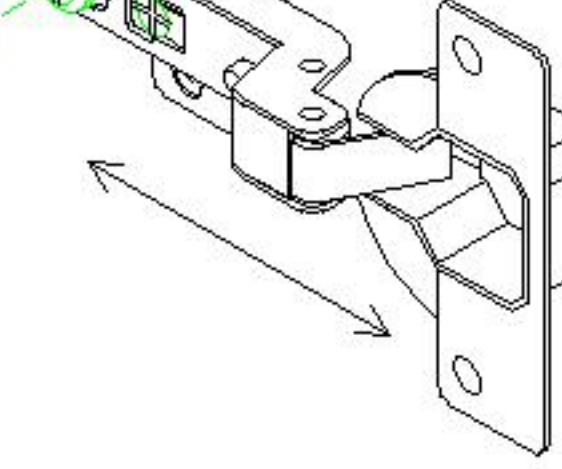

门铰
Hinge

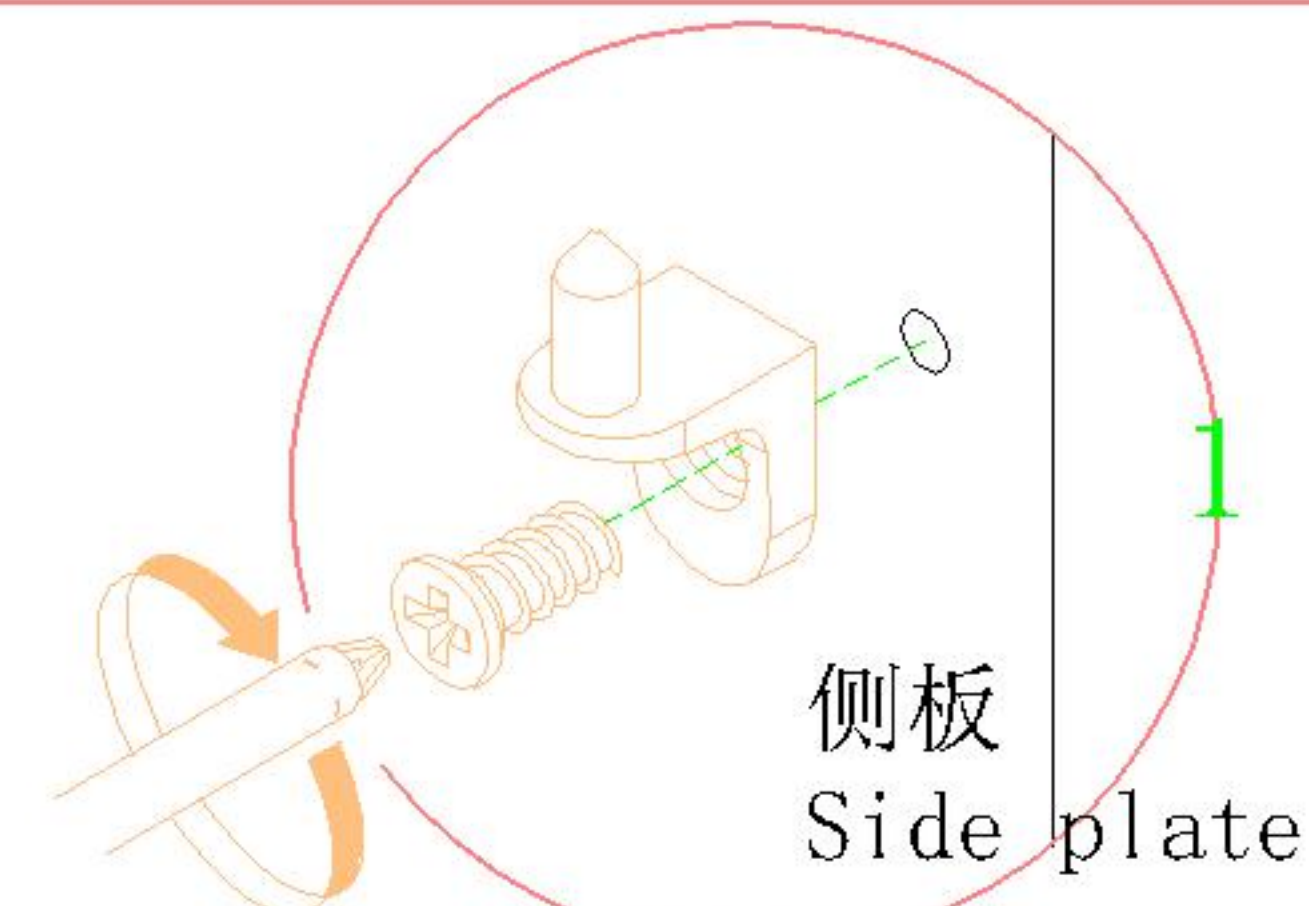

侧板
Side plate

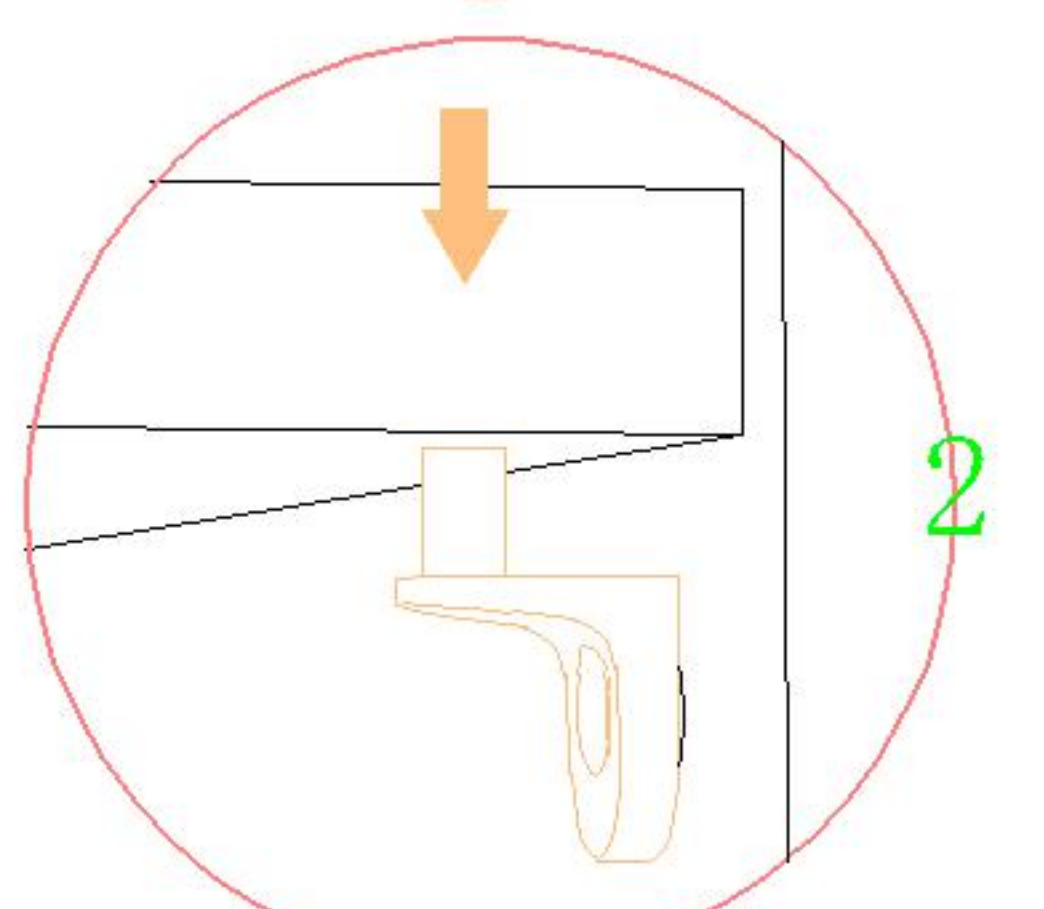

层板托5mm
shelf support

(P)*8

(A)*8


(J)*4

(Q)*1

(R)*1

(U)*1

14

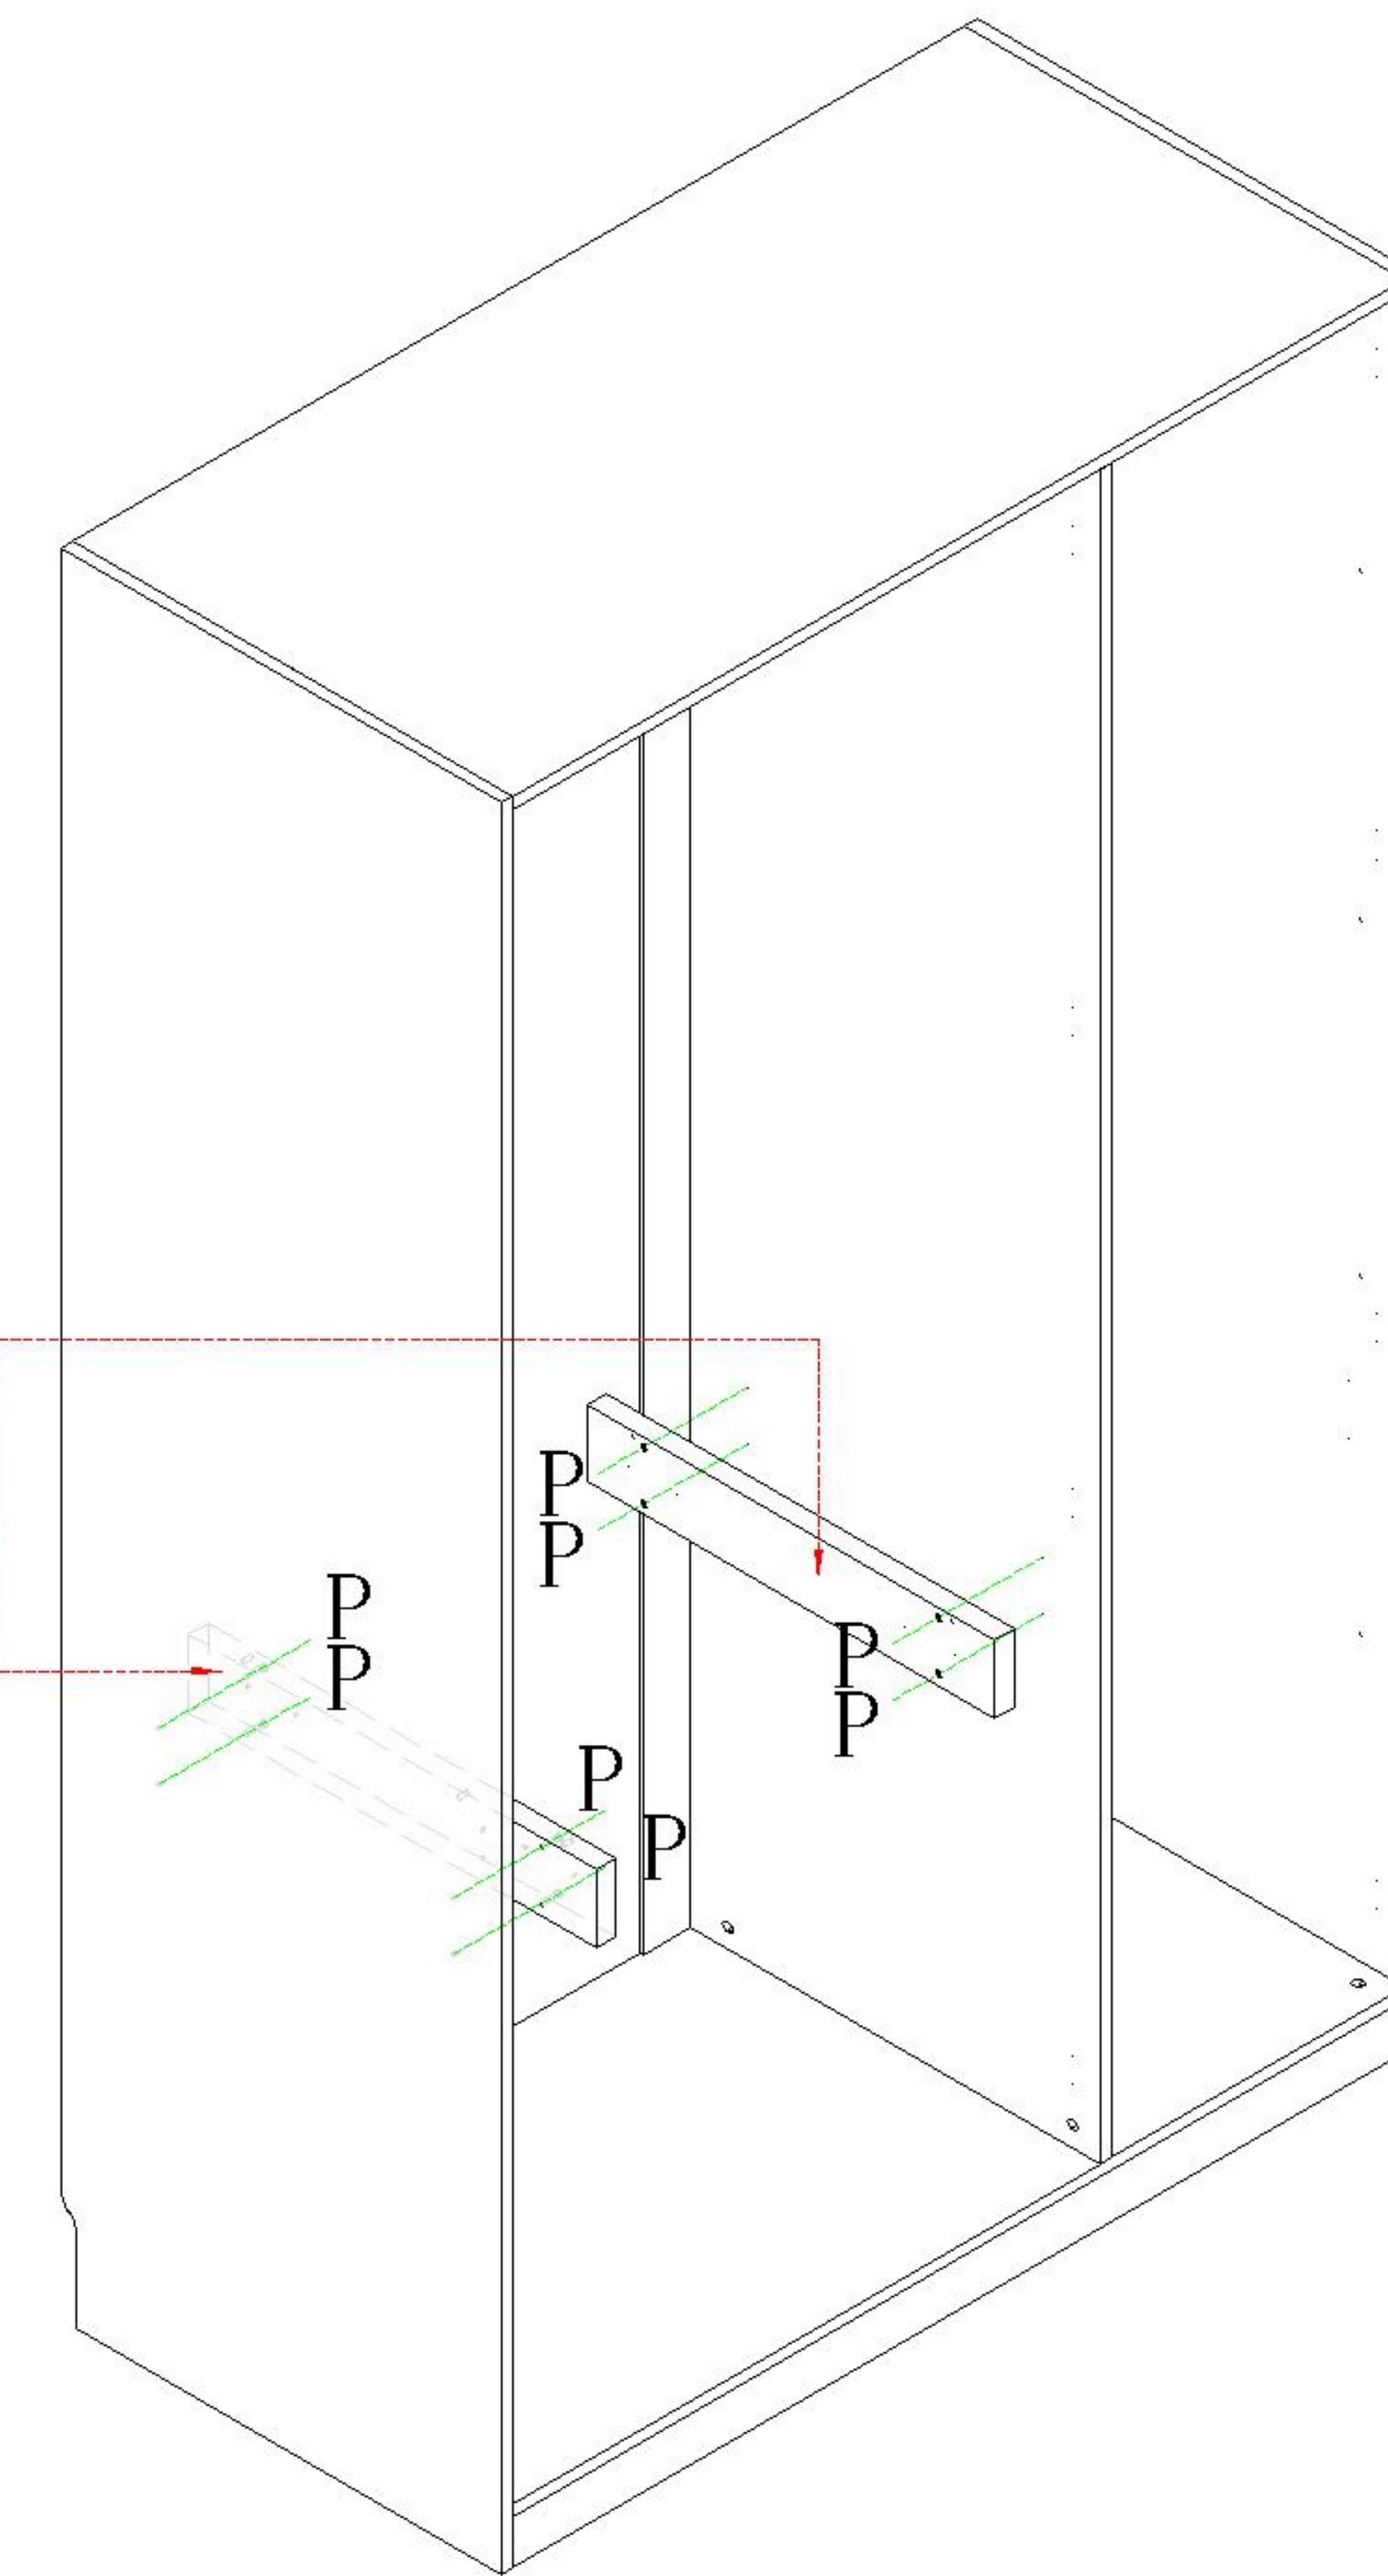


9

(A)*8

(L)*12

(T)*1

T 主轨
Main rail

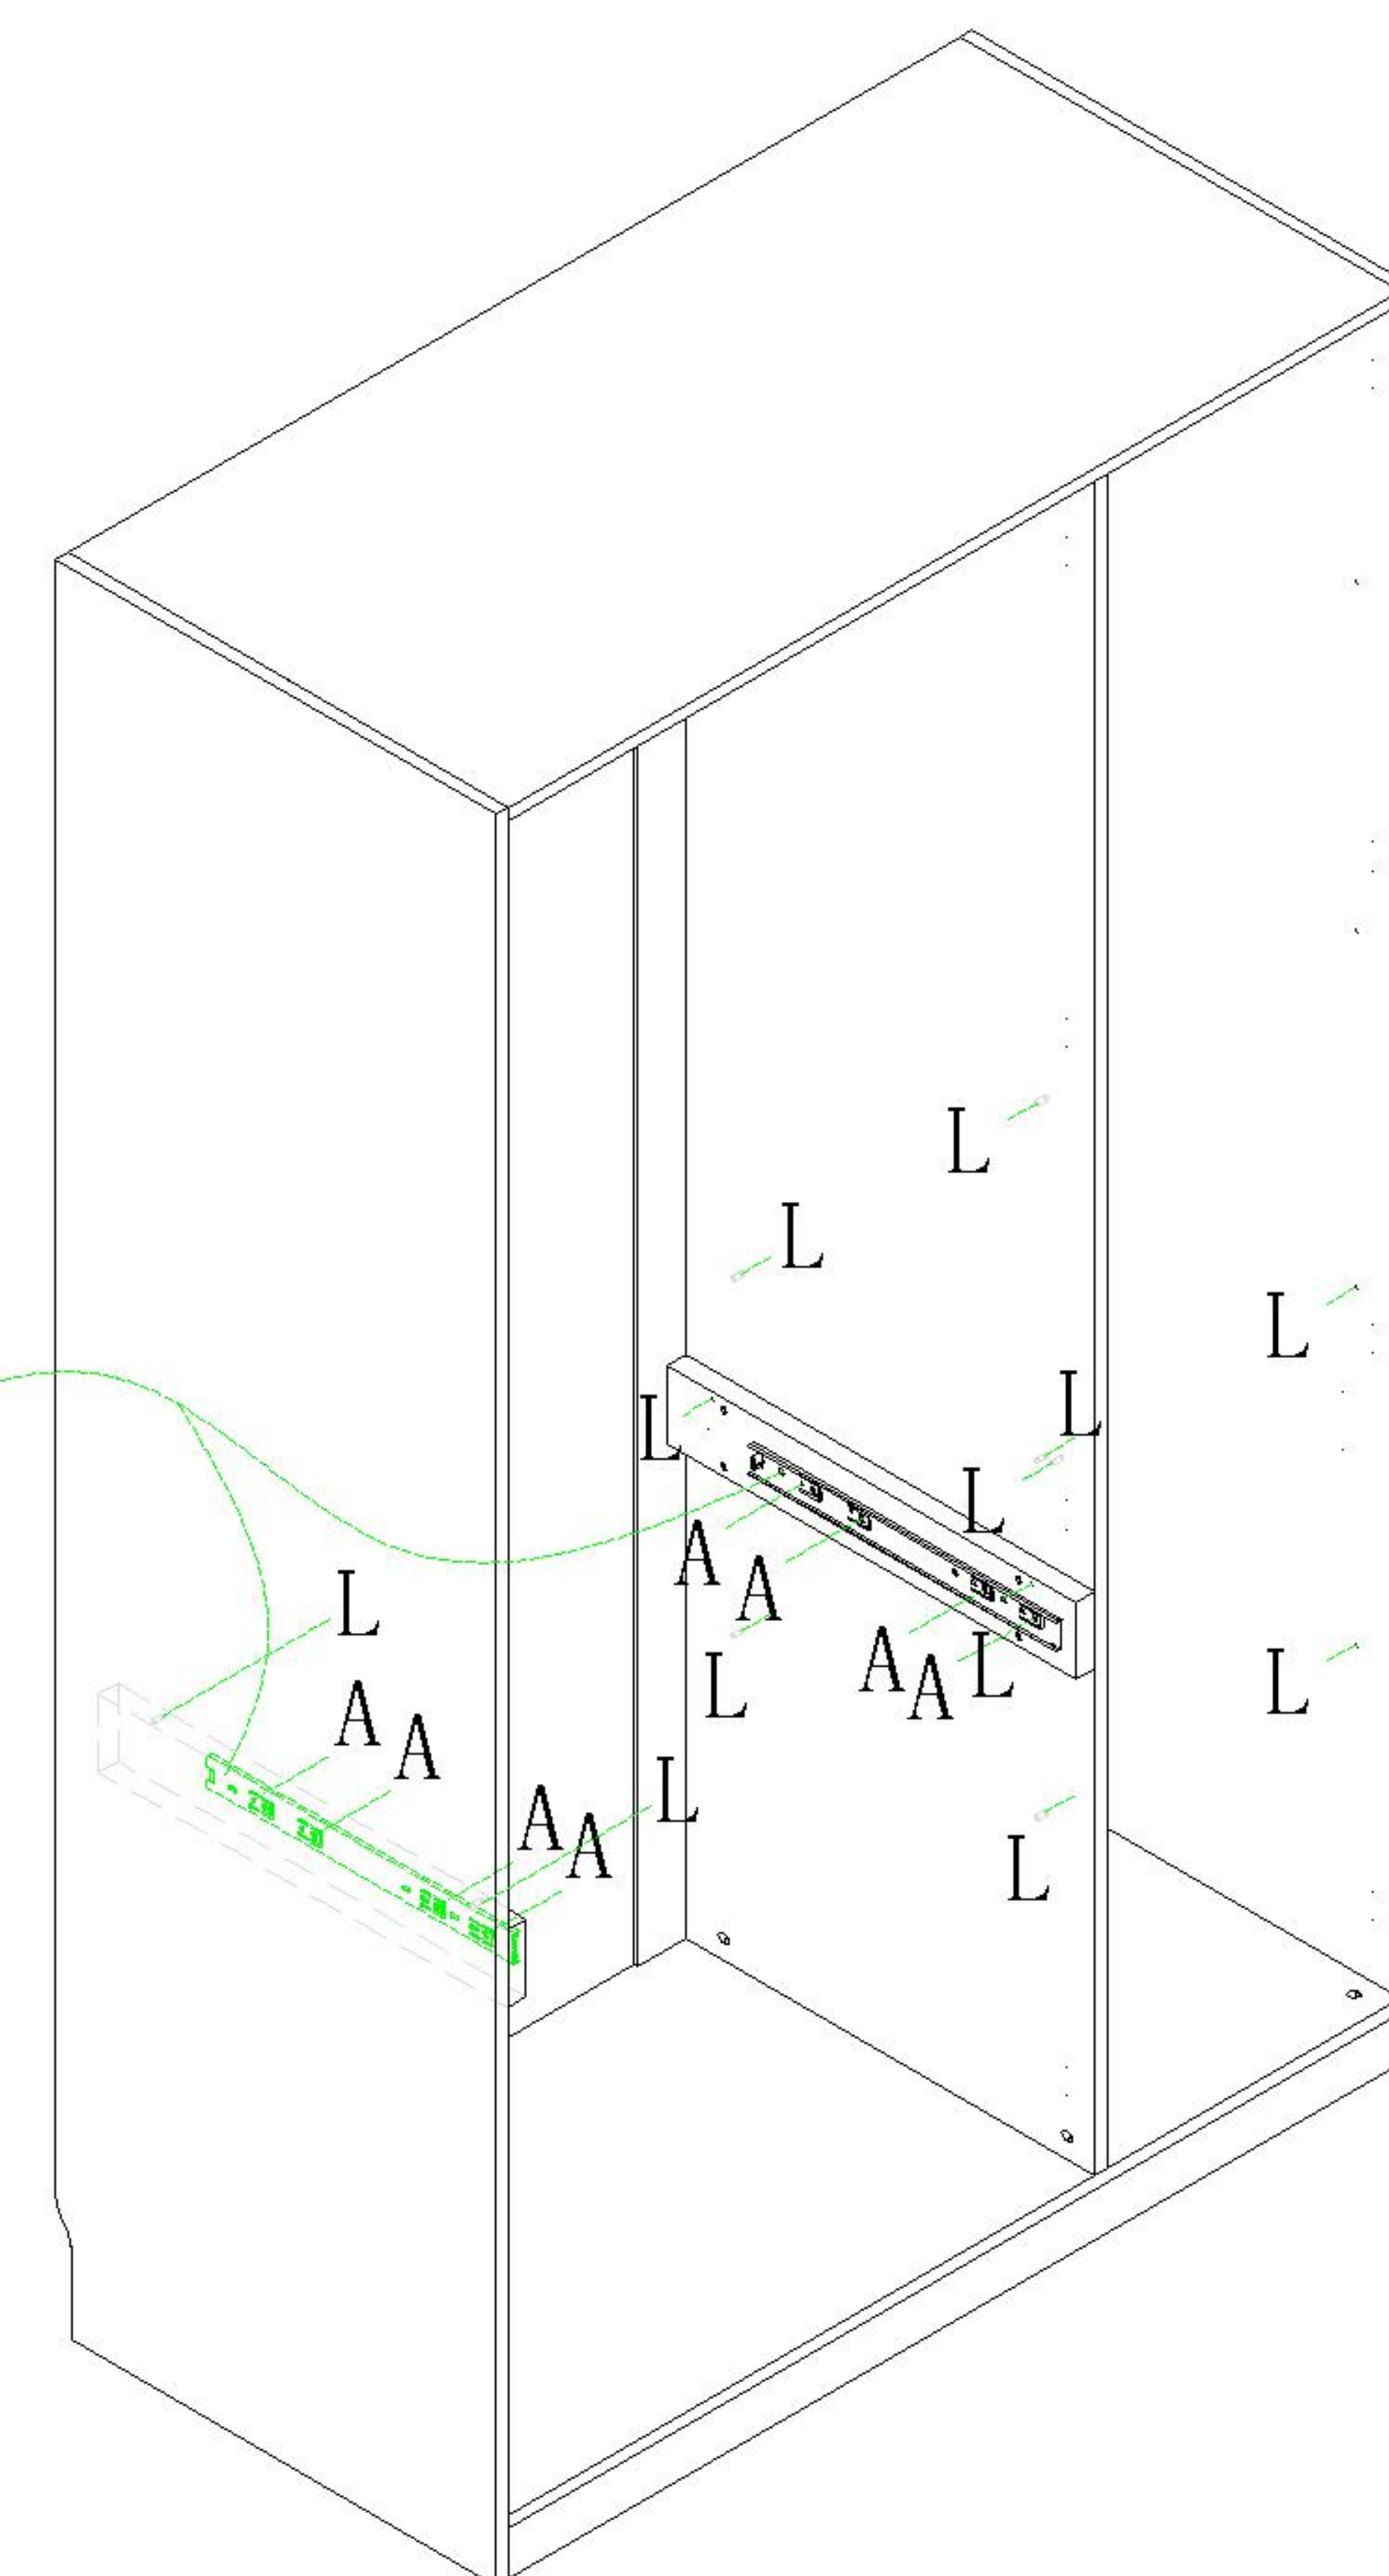


10

11

(G)*3


(H)*3

(K)*12

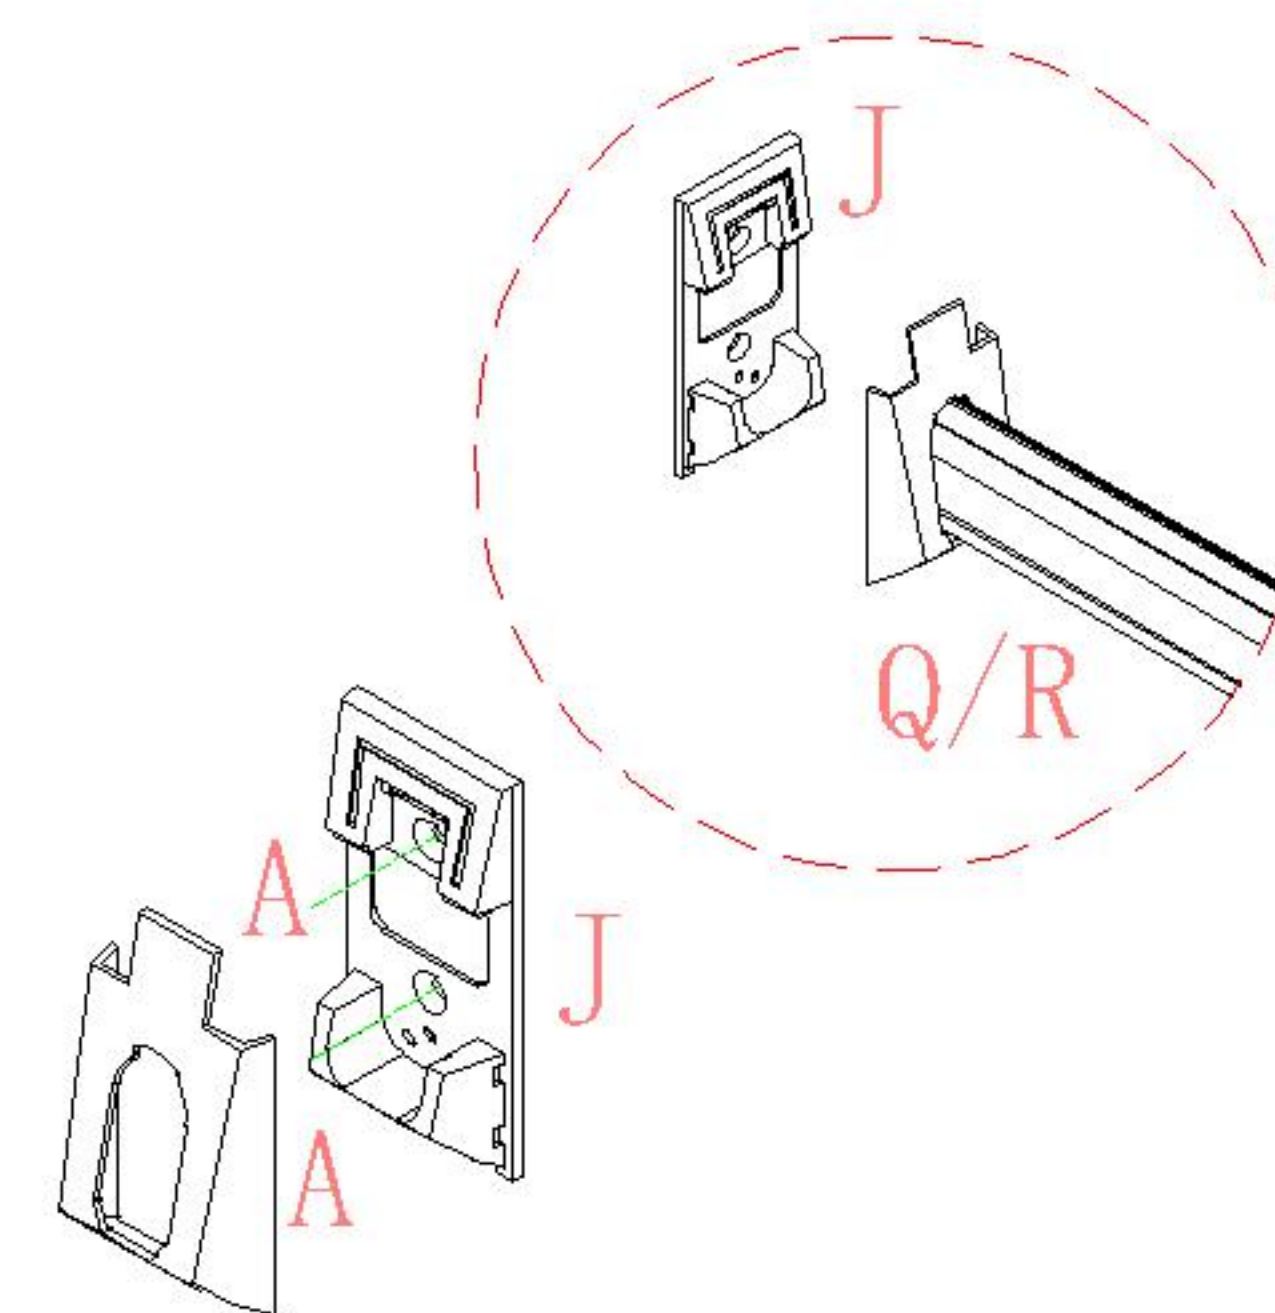

注意!五金U: 把3M胶铁片贴在顶板的适宜位置上, 把人体感应LED灯开关调整好后放入即可使用。

Attention! Hardware U: Put the 3M rubber iron sheet on the appropriate position of the top plate, adjust the human induction LED light switch and then put it into use.

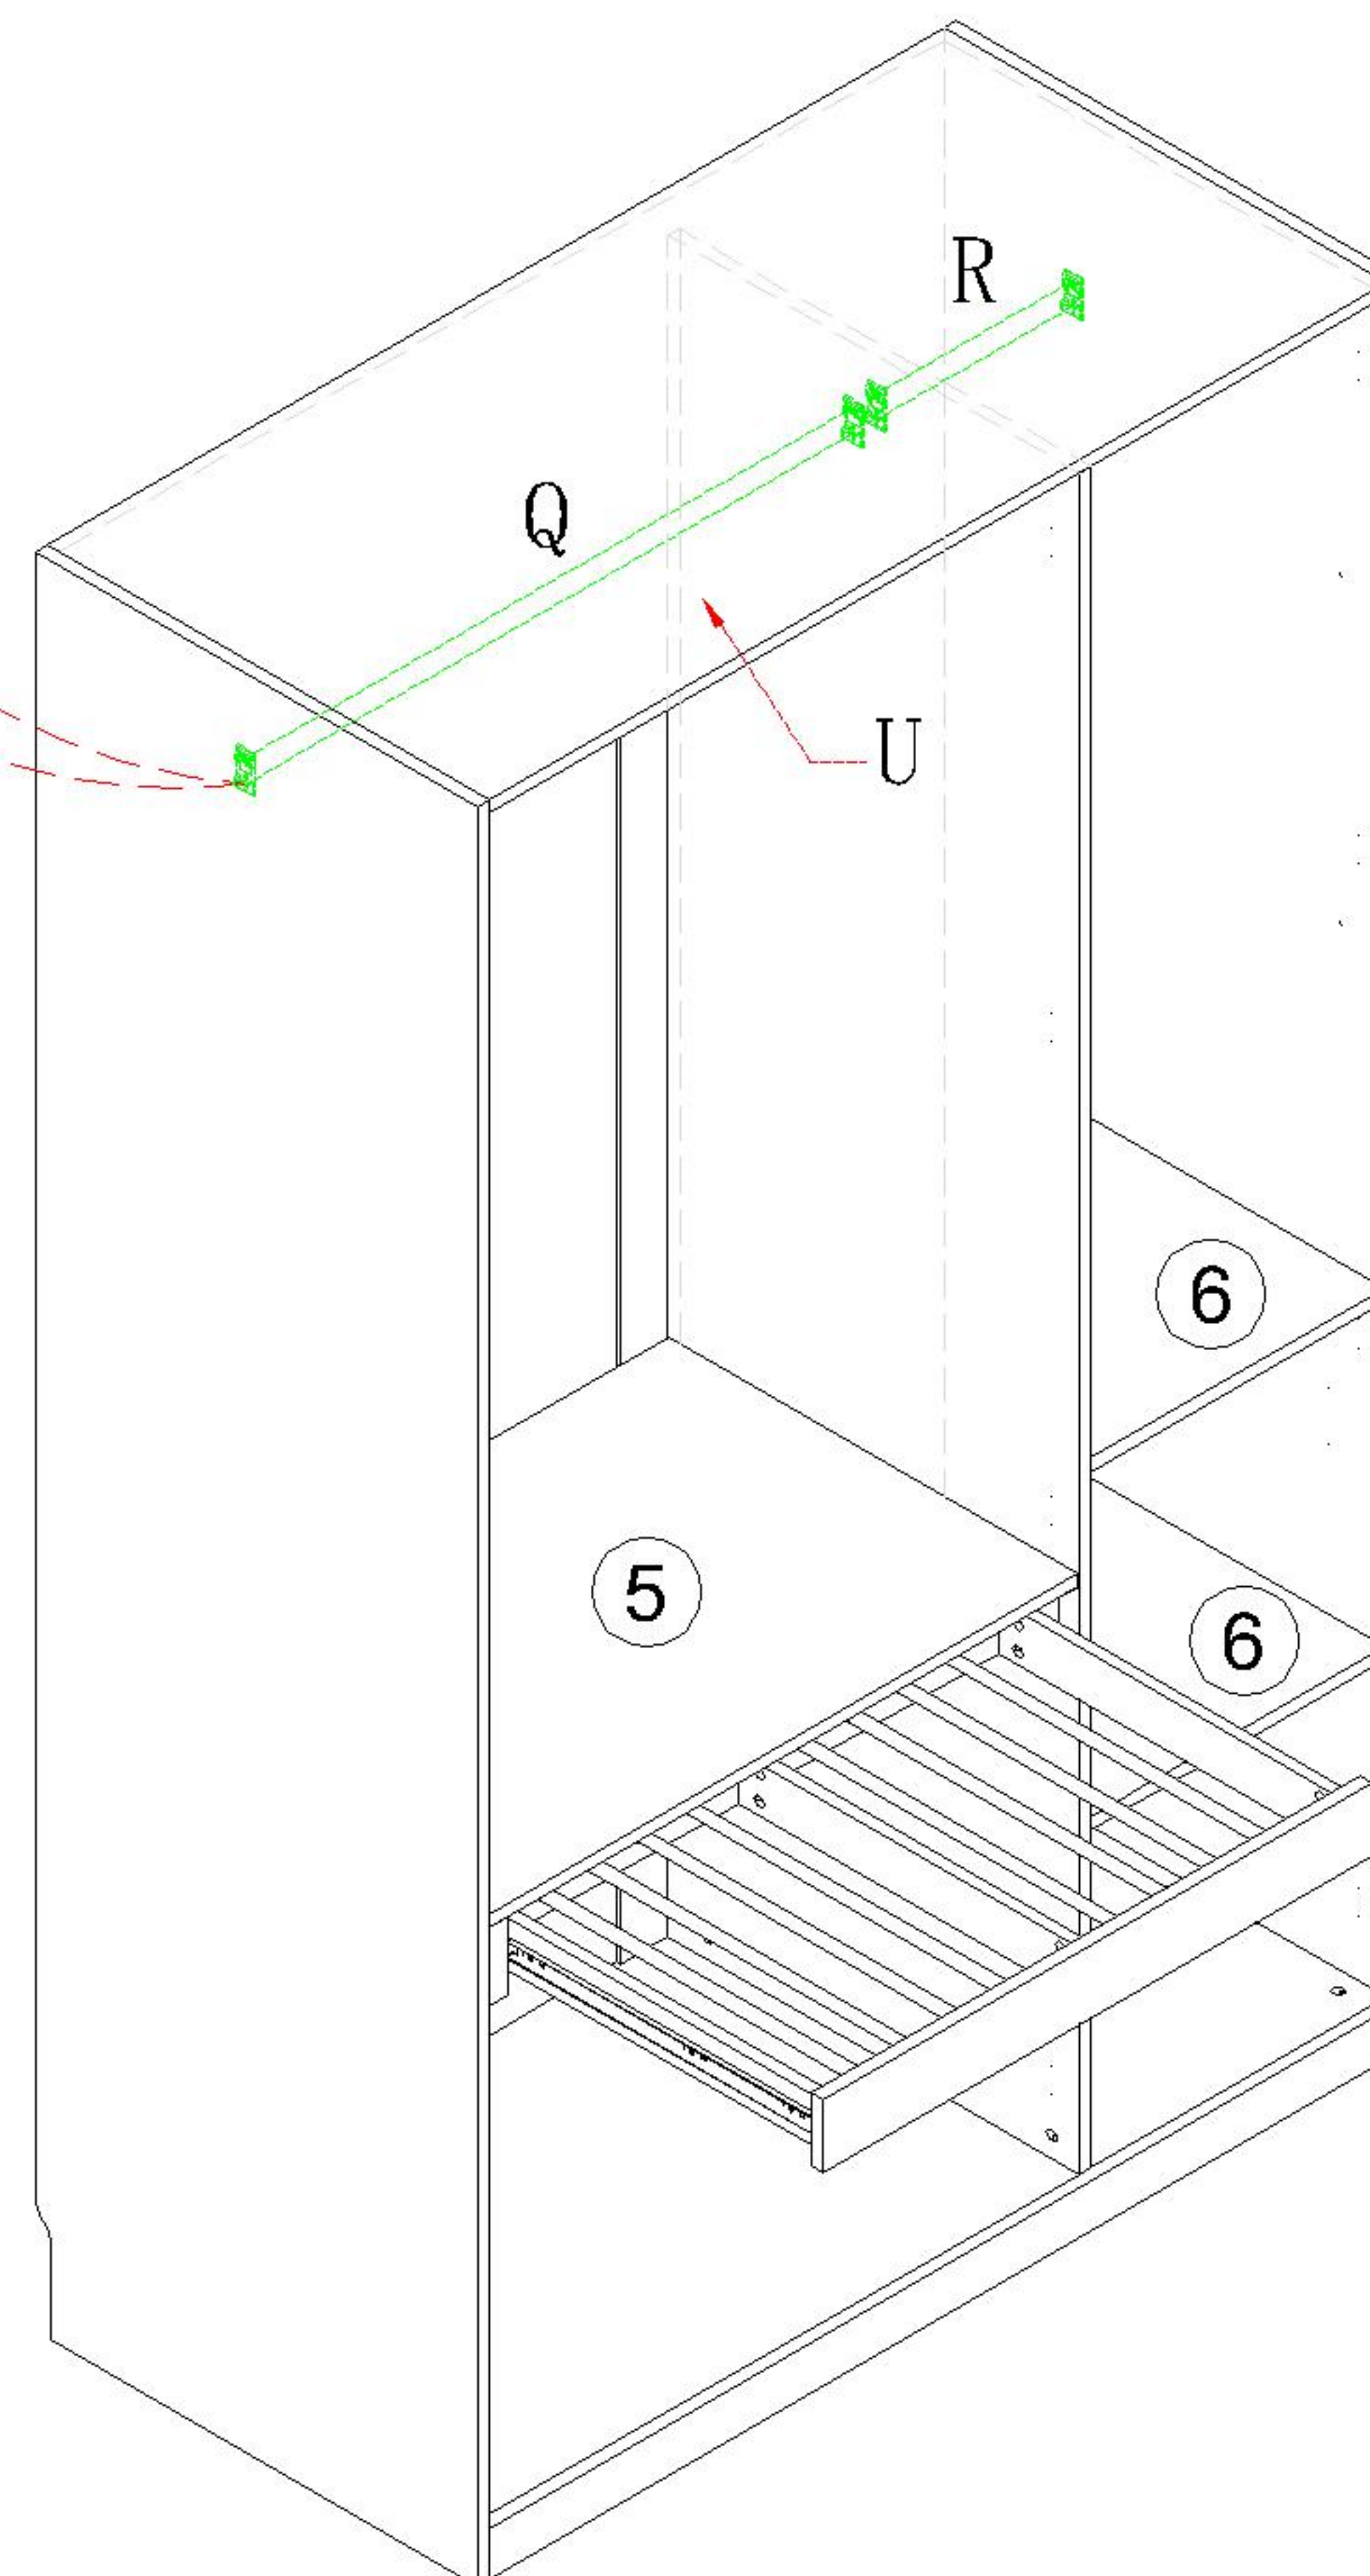

12

(G)*3

(H)*3

(K)*12

